


東芝ランプ 配光データシート

名称	マスターカラー
形名	CDM-R70W/83 OPAR30L10
光束	4850 lm × 1

保守率	良	0.71
	中	0.69
	否	0.65

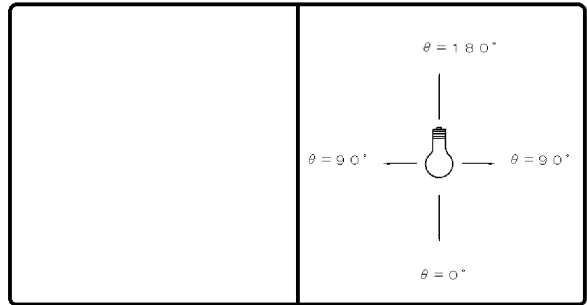

効率	F	%
	F	%
	F	100 %
	器具光束	4850 lm

最大取付間隔	
A-A	0.2 H
B-B	0.2 H

備考	
----	--

光度 (cd/1000lm)			
0°	14021	25°	213
1°	17716	30°	168
2°	12167	35°	142
3°	10163	40°	84
4°	8273	45°	42
5°	6581	50°	24
6°	5269	55°	15
7°	4261	60°	11
8°	3473	65°	7
9°	2824	70°	2
10°	2302	75°	0
11°	1873	80°	0
12°	1519	85°	0
13°	1222	90°	0
14°	1001		
15°	828		
16°	690		
17°	587		
18°	508		
19°	444		
20°	391		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0	0		
室指数	照明率 (×0.01)																			
0.60	105	97	96	91	91	88	104	96	96	91	90	88	94	90	90	87	89	87	85	84
0.80	112	102	104	97	98	94	111	101	103	97	97	94	101	96	96	93	95	93	91	90
1.00	118	106	109	101	103	98	115	105	108	101	102	98	105	100	100	97	99	96	94	93
1.25	121	107	112	103	106	100	118	106	110	102	105	99	107	101	103	98	101	98	95	94
1.50	123	109	115	104	109	101	120	107	113	104	107	101	109	102	105	100	102	99	96	95
2.00	127	110	119	107	114	104	124	109	117	106	112	103	112	104	108	102	105	101	98	97
2.50	130	112	123	109	118	106	126	111	120	108	115	105	115	106	111	104	107	103	100	99
3.00	132	113	126	111	121	108	128	112	123	110	119	108	117	108	114	106	109	105	103	101
4.00	136	116	131	114	127	112	132	114	128	113	124	111	121	111	118	109	113	108	106	104
5.00	138	117	135	116	132	115	134	116	131	115	128	114	124	113	122	112	116	110	109	107
10.00	144	120	143	120	142	120	139	119	138	119	137	119	130	117	129	117	122	115	114	113

