


■ 東芝ランプ 配光データシート

名 称	ネオハロビーム
形 名	JR12V35W/K5 FEZ
光 束	640 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

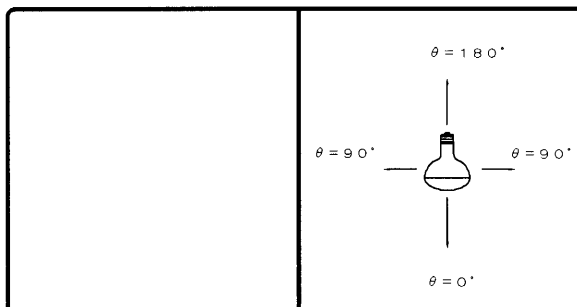

効 率	F	%
	F	%
	F	100 %
	器具 光束	640 lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備 考	
--------	--

光度 (cd/1000lm)		
0°	2344	25° 422
1°		30° 172
2°		35° 102
3°		40° 70
4°		45° 55
5°	2172	50° 47
6°		55° 39
7°		60° 39
8°		65° 16
9°		70° 16
10°	1852	75° 8
11°		80° 8
12°		85° 0
13°		90° 0
14°		
15°	1453	
16°		
17°		
18°		
19°		
20°	969	

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		90	83	80	76	74	71	88	82	79	75	73	71	77	74	72	71	71	70	67	66		
0.80		98	89	88	83	82	79	96	88	87	82	81	78	85	81	80	77	78	77	74	73		
1.00		105	94	95	88	89	84	102	93	94	87	88	84	91	86	86	83	84	82	79	77		
1.25		109	97	100	91	93	87	106	96	98	91	92	87	94	89	89	86	87	85	82	80		
1.50		112	99	104	94	97	90	109	98	101	93	95	89	97	91	92	88	90	87	84	82		
2.00		117	102	109	98	103	94	114	100	107	96	101	93	102	94	97	92	94	90	87	86		
2.50		120	104	113	100	108	97	116	102	110	99	105	96	105	97	101	94	96	93	90	88		
3.00		123	105	117	102	111	99	119	104	113	101	109	98	107	99	104	96	99	95	92	90		
4.00		126	107	121	105	117	103	122	106	118	104	114	102	111	101	108	100	102	98	96	93		
5.00		129	109	125	107	121	105	124	107	121	106	118	104	113	103	111	102	105	100	98	96		
10.00		134	112	132	111	130	111	129	110	127	110	126	109	119	107	118	107	111	104	103	101		

