

東芝照明器具配光データシート


名 称	白熱灯器具
形 名	ID73731S (W)

光源	名 称	ミニクリプトンランプ
	形 名	KR100/110V5 7W・W
	光 束	800 lm × 1

前 面	下面開放
反射面	上部：銀色鏡面、下部 白

保守率	良	0.81
	中	0.77
	否	0.67

効 率	F 	0 %
	F 	80 %
	F 	80 %
	器具 光束	644 lm

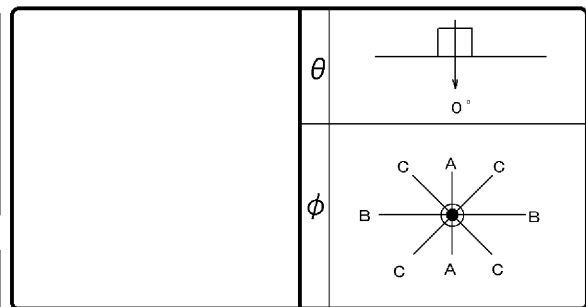

最大取付間隔	
A-A	1.1 H
B-B	1.2 H

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	421	431	429
10°	405	455	439
20°	395	423	412
30°	313	339	340
40°	204	200	210
50°	127	133	131
60°	71	84	79
70°	28	31	29
80°	13	14	13
90°	1	2	2
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		55	50	44	42	38	36	53	49	43	41	37	36	42	41	37	36	36	36	32	31		
0.80		64	58	53	50	46	44	62	57	52	49	46	44	51	48	45	44	44	43	40	39		
1.00		71	64	61	57	54	51	69	63	60	56	53	51	58	55	52	50	51	50	47	45		
1.25		76	68	67	61	60	57	74	67	66	61	60	56	63	60	58	56	56	55	52	50		
1.50		81	71	72	65	65	61	78	70	70	65	64	60	67	63	63	60	61	59	56	54		
2.00		86	75	79	70	73	67	84	74	77	70	72	66	73	68	69	65	67	64	61	60		
2.50		90	77	83	74	78	70	87	76	81	73	76	70	77	71	73	68	70	67	65	63		
3.00		92	79	86	76	82	73	89	78	84	75	80	72	80	73	76	71	73	70	67	66		
4.00		95	81	91	78	86	76	92	80	88	78	84	75	83	76	80	74	76	73	71	69		
5.00		97	82	93	80	90	78	94	81	90	79	87	77	85	77	83	76	78	74	73	71		
10.00		101	85	99	83	97	82	97	84	96	83	94	82	89	81	88	80	83	78	77	75		

