



東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30223N

保 守 率	0.79
光 束 換 算 係 数	1.00



光 源	平常時	×
	非常時	JB8. 4V30W × 1
光 束	定 格	780 lm
	非常時	592 lm


前 面	下面開放
反射面	アルミ蒸着処理

備 考 中天井用



配置表 (保守率、光束換算係数を含む)

取付高さ	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0
単 体 配 置										
A1	4.6	5.1	5.5	5.9	6.7	7.2	6.8	7.2	7.2	4.4
A'1	4.6	5.1	5.5	5.9	6.7	7.2	6.8	7.2	7.2	4.4
B1	4.6	5.1	5.5	5.9	6.7	7.2	6.8	7.2	7.2	4.4
B'1	4.6	5.1	5.5	5.9	6.7	7.2	6.8	7.2	7.2	4.4
直 線 配 置										
A2	9.2	10.6	11.4	12.8	14.6	16.2	17.2	18.8	19.2	19.8
B2	9.2	10.6	11.4	12.8	14.6	16.2	17.2	18.8	19.2	19.8
四 角 配 置										
A4	6.8	7.8	8.4	9.6	11.1	12.4	13.6	14.8	16.6	18.8
B4	6.8	7.8	8.4	9.6	11.1	12.4	13.6	14.8	16.6	18.8
壁 からの 最大取付距離										
A'O	3.4	3.8	4.0	4.4	4.9	5.3	5.3	5.3	5.1	0.2
A'O	3.4	3.8	4.0	4.4	4.9	5.3	5.3	5.3	5.1	0.2
B'O	3.4	3.8	4.0	4.4	4.9	5.3	5.3	5.3	5.1	0.2
B'O	3.4	3.8	4.0	4.4	4.9	5.3	5.3	5.3	5.1	0.2

配光曲線 (cd/1000lm)

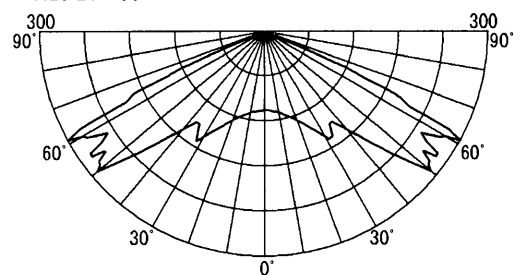

φ = 0°

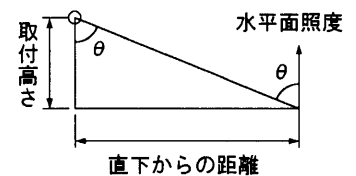
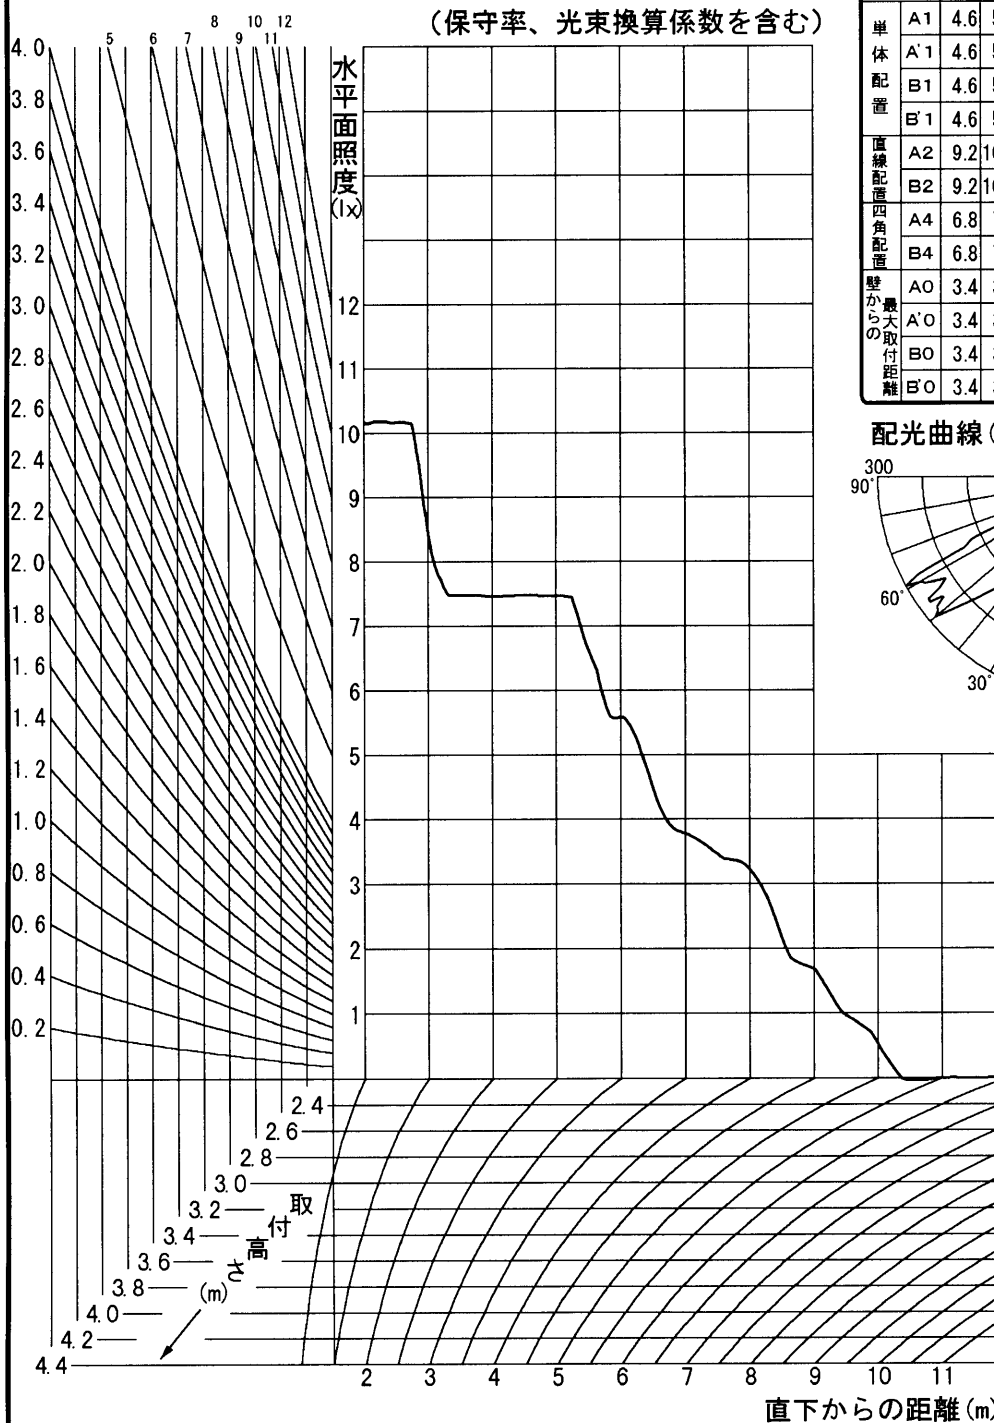


東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30223N

保 守 率	0.79
光 束 換 算 係 数	1.00



光源	平常時	×
	非常時	JB8. 4V30W × 1
光束	定 格	780 lm
	非常時	592 lm

前 面
下面開放
反射面
アルミ蒸着処理

備 考 中天井用

光度 (cd/1000lm)						
θ \ φ	0° (A)	45° (C)	90° (B)	135° (C')	180° (A')	
0°	105					
10°	110					
20°	127					
30°	162					
40°	172					
50°	290					
60°	280					
70°	0					
80°	0					
90°	0					
100°	0					
110°	0					
120°	0					
130°	0					
140°	0					
150°	0					
160°	0					
170°	0					
180°	0					



器具直下からの各方向への指定照度が得られる距離 (m) (保守率、光束換算係数を含む)																
照度 (lx) \ 取付け高さ (m)	2.1	2.4	2.6	3.0	3.5	4.0	4.5	5.0	6.0	7.0	8.0	10.0	12.0	14.0	16.0	
1	0°	4.6	5.1	5.5	5.9	6.7	7.2	6.8	7.2	7.2	4.4	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.5	0°	4.8	5.4	5.9	6.6	7.4	8.2	8.8	9.5	9.8	10.1	10.1	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.25	0°	4.9	5.5	6.0	6.9	7.9	8.9	9.7	10.5	11.8	13.3	14.5	14.3	14.4	8.8	-
	45°															
	90°															
	135°															
	180°															

東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30223N

保 守 率	0.79
光 束 換 算 係 数	1.00



光 源	平常時	×
	非常時	JB8. 4V30W × 1
光 束	定 格	780 lm
	非常時	592 lm

前 面
下面開放
反射面
アルミ蒸着処理

備 考	中天井用
-----	------

配置表 (保守率、光束換算係数を含む)

取 付 高 さ		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単 体 配 置	A1	4.6	4.7	4.9	5.1	5.3	5.5	5.6	5.8	5.9	5.9	6.1	6.2	6.4	6.5	6.7	6.8
	A'1	4.6	4.7	4.9	5.1	5.3	5.5	5.6	5.8	5.9	5.9	6.1	6.2	6.4	6.5	6.7	6.8
	B1	4.6	4.7	4.9	5.1	5.3	5.5	5.6	5.8	5.9	5.9	6.1	6.2	6.4	6.5	6.7	6.8
	B'1	4.6	4.7	4.9	5.1	5.3	5.5	5.6	5.8	5.9	5.9	6.1	6.2	6.4	6.5	6.7	6.8
直 線 配 置	A2	9.2	9.8	10.2	10.6	11.0	11.4	11.8	12.2	12.4	12.8	13.2	13.4	13.8	14.2	14.6	14.8
	B2	9.2	9.8	10.2	10.6	11.0	11.4	11.8	12.2	12.4	12.8	13.2	13.4	13.8	14.2	14.6	14.8
四 角 配 置	A4	6.8	7.1	7.5	7.8	8.1	8.4	8.7	9.0	9.3	9.6	9.9	10.2	10.5	10.8	11.1	11.4
	B4	6.8	7.1	7.5	7.8	8.1	8.4	8.7	9.0	9.3	9.6	9.9	10.2	10.5	10.8	11.1	11.4
壁からの 最大取付距離	A0	3.4	3.6	3.7	3.8	4.0	4.0	4.2	4.3	4.4	4.4	4.5	4.6	4.7	4.8	4.9	5.0
	A'0	3.4	3.6	3.7	3.8	4.0	4.0	4.2	4.3	4.4	4.4	4.5	4.6	4.7	4.8	4.9	5.0
	B0	3.4	3.6	3.7	3.8	4.0	4.0	4.2	4.3	4.4	4.4	4.5	4.6	4.7	4.8	4.9	5.0
	B'0	3.4	3.6	3.7	3.8	4.0	4.0	4.2	4.3	4.4	4.4	4.5	4.6	4.7	4.8	4.9	5.0

取 付 高 さ		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単 体 配 置	A1	7.0	7.1	7.2	7.2	7.0	6.9	6.8	6.8	6.8	7.2	7.1	7.2	4.4	4.4	-	-
	A'1	7.0	7.1	7.2	7.2	7.0	6.9	6.8	6.8	6.8	7.2	7.1	7.2	4.4	4.4	-	-
	B1	7.0	7.1	7.2	7.2	7.0	6.9	6.8	6.8	6.8	7.2	7.1	7.2	4.4	4.4	-	-
	B'1	7.0	7.1	7.2	7.2	7.0	6.9	6.8	6.8	6.8	7.2	7.1	7.2	4.4	4.4	-	-
直 線 配 置	A2	15.2	15.6	15.8	16.2	16.4	16.4	16.6	17.0	17.2	18.8	20.0	19.2	19.2	19.8	19.4	19.8
	B2	15.2	15.6	15.8	16.2	16.4	16.4	16.6	17.0	17.2	18.8	20.0	19.2	19.2	19.8	19.4	19.8
四 角 配 置	A4	11.7	12.0	12.2	12.4	12.7	12.9	13.1	13.3	13.6	14.8	16.0	16.6	17.7	18.8	19.4	19.8
	B4	11.7	12.0	12.2	12.4	12.7	12.9	13.1	13.3	13.6	14.8	16.0	16.6	17.7	18.8	19.4	19.8
壁からの 最大取付距離	A0	5.0	5.1	5.2	5.3	5.4	5.3	5.3	5.3	5.3	5.3	5.1	5.1	2.5	0.2	0.2	0.2
	A'0	5.0	5.1	5.2	5.3	5.4	5.3	5.3	5.3	5.3	5.3	5.1	5.1	2.5	0.2	0.2	0.2
	B0	5.0	5.1	5.2	5.3	5.4	5.3	5.3	5.3	5.3	5.3	5.1	5.1	2.5	0.2	0.2	0.2
	B'0	5.0	5.1	5.2	5.3	5.4	5.3	5.3	5.3	5.3	5.3	5.1	5.1	2.5	0.2	0.2	0.2



取 付 高 さ	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
単 体 配 置	A1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	A'1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	B'1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
直 線 配 置	A2	19.8	12.2	12.2	-	-	-	-	-	-	-	-	-	-	-	-
	B2	19.8	12.2	12.2	-	-	-	-	-	-	-	-	-	-	-	-
四 角 配 置	A4	19.4	12.2	12.2	-	-	-	-	-	-	-	-	-	-	-	-
	B4	19.4	12.2	12.2	-	-	-	-	-	-	-	-	-	-	-	-
壁からの 最大取付距離	A0	0.2	4.1	3.2	-	-	-	-	-	-	-	-	-	-	-	-
	A'0	0.2	4.1	3.2	-	-	-	-	-	-	-	-	-	-	-	-
	B0	0.2	4.1	3.2	-	-	-	-	-	-	-	-	-	-	-	-
	B'0	0.2	4.1	3.2	-	-	-	-	-	-	-	-	-	-	-	-

東芝照明器具配光データシート

非常灯

名 称	非常用白熱灯専用形 (電池内蔵)
形 名	IEM-30223N

保 守 率	0.79
光 束 換 算 係 数	1.00



光源	平常時	×
	非常時	JB8. 4V30W × 1
光束	定 格	780 lm
	非常時	592 lm

前 面	下面開放
反射面	アルミ蒸着処理

備 考 中天井用

器具直下からの各方面への指定照度が得られる距離(m) (保守率、光束換算係数を含む)

取付け高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
1	0°	4.6	4.7	4.9	5.1	5.3	5.5	5.6	5.8	5.9	5.9	6.1	6.2	6.4	6.5	6.7	6.8
	45°																
	90°																
	135°																
	180°																
0.5	0°	4.8	5.0	5.2	5.4	5.6	5.9	6.0	6.2	6.4	6.6	6.7	6.9	7.0	7.2	7.4	7.5
	45°																
	90°																
	135°																
	180°																
0.25	0°	4.9	5.1	5.3	5.5	5.8	6.0	6.2	6.4	6.6	6.9	7.1	7.3	7.5	7.7	7.9	8.1
	45°																
	90°																
	135°																
	180°																

取付け高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
1	0°	7.0	7.1	7.2	7.2	7.0	6.9	6.8	6.7	6.8	7.2	7.1	7.2	4.4	4.4	-	-
	45°																
	90°																
	135°																
	180°																
0.5	0°	7.7	7.9	8.1	8.2	8.3	8.4	8.4	8.6	8.8	9.5	10.1	9.8	9.7	10.1	9.9	10.1
	45°																
	90°																
	135°																
	180°																
0.25	0°	8.3	8.5	8.7	8.9	9.0	9.2	9.3	9.5	9.7	10.5	11.4	11.8	12.6	13.3	14.0	14.5
	45°																
	90°																
	135°																
	180°																

取付け高さ (m)	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
1	0°	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.5	0°	10.1	6.2	6.2	-	-	-	-	-	-	-	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.25	0°	13.8	13.6	13.9	14.3	13.9	14.1	14.2	14.4	8.8	8.8	8.8	8.8	-	-	-
	45°															
	90°															
	135°															
	180°															