


■ 東芝ランプ 配光データシート

名 称	ネオハロクールH
形 名	JD110V130WN P-EH
光 束	2520 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

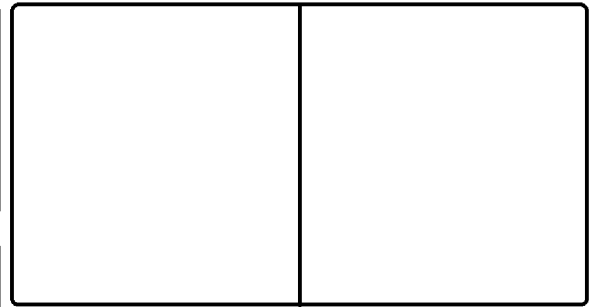

効 率	F		%
	F		%
	F	100	%
	器具 光束	2520	lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備 考	
--------	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		63	
10°		36	
20°		34	
30°		56	
40°		69	
50°		77	
60°		75	
70°		73	
80°		77	
90°		81	
100°		81	
110°		73	
120°		67	
130°		62	
140°		56	
150°		40	
160°		28	
170°		6	
180°		0	

反射率 (%)	天井	80								70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率 (×0.01)																							
0.60		40	36	27	26	20	19	36	33	25	24	18	18	21	20	15	15	12	12	7	4				
0.80		47	43	34	32	26	25	43	39	31	30	24	23	26	25	20	19	16	16	11	7				
1.00		54	48	41	38	32	31	48	44	37	35	30	28	31	29	24	24	20	19	14	9				
1.25		59	53	47	43	38	36	53	48	43	39	35	33	35	33	29	28	23	23	17	12				
1.50		64	56	52	47	43	40	57	51	47	43	39	37	39	36	33	31	26	25	20	14				
2.00		70	61	59	53	51	46	63	56	54	49	46	43	44	41	38	36	31	30	24	17				
2.50		74	64	64	57	56	51	67	59	59	53	51	47	48	44	43	40	34	33	27	20				
3.00		77	66	68	60	61	54	70	61	62	55	56	50	51	47	46	43	37	35	29	22				
4.00		81	69	74	64	67	59	74	64	67	59	61	55	55	50	50	47	41	39	33	25				
5.00		84	71	77	66	71	62	76	66	70	62	65	58	58	52	54	49	43	41	35	27				
10.00		90	75	86	73	82	70	82	70	78	68	75	65	64	58	61	56	50	47	41	33				

