


■ 東芝ランプ 配光データシート

名称	メロウZ
形名	FL20SS・EX-D /18-Z
光束	1450 lm × 1

保守率	良	0.81
	中	0.78
	否	0.74

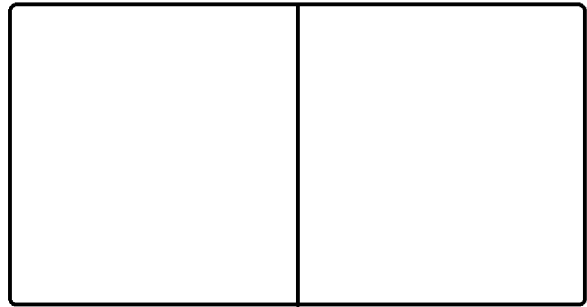

効率	F	%
	F	%
	F	100 %
	器具光束	1450 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考	
----	--

光度 (cd/1000lm)			
θ	φ	A-A	B-B C-C
0°		95	
10°		95	
20°		95	
30°		95	
40°		95	
50°		95	
60°		95	
70°		95	
80°		95	
90°		95	
100°		95	
110°		95	
120°		95	
130°		95	
140°		95	
150°		95	
160°		95	
170°		95	
180°		95	

反射率 (%)	天井	80						70						50						30		20		0				
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	30	10	0	30	10	0	30	10	0	30	10
室指数	照明率 (×0.01)																											
0.60	59	55	42	40	32	31	54	50	39	37	30	29	32	31	25	24	20	20	14	9								
0.80	71	64	53	50	42	40	64	59	49	46	39	37	40	38	32	31	26	26	19	13								
1.00	79	70	61	57	49	47	71	64	56	52	45	43	46	44	38	37	31	30	23	16								
1.25	87	77	70	64	58	54	79	71	64	59	53	50	52	49	44	42	36	35	27	20								
1.50	92	81	76	69	64	60	83	75	69	64	59	55	57	53	49	47	40	38	30	22								
2.00	102	89	87	78	76	69	92	81	79	72	69	64	65	60	57	54	46	45	36	27								
2.50	107	93	94	83	83	75	97	85	86	77	76	69	70	65	63	59	51	49	40	30								
3.00	112	96	100	87	89	80	101	88	91	81	82	74	74	68	67	63	54	52	43	33								
4.00	118	100	107	93	98	86	106	92	97	86	90	80	79	73	74	68	59	56	48	37								
5.00	121	103	112	96	104	91	110	95	102	89	95	84	83	76	78	72	63	59	51	39								
10.00	130	108	124	105	119	101	117	101	113	97	108	94	92	83	88	80	71	67	59	46								

