


東芝ランプ 配光データシート

名称	ネオハロビーム
形名	JR12V50WH/K 5MEZ
光束	700 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

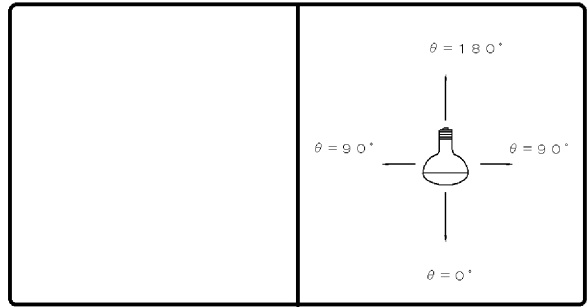

効率	F	%
	F	%
	F	100 %
	器具光束	700 lm

最大取付間隔	
A-A	0.4 H
B-B	0.4 H

備考

光度 (cd/1000lm)			
0°	3500	25°	80
1°		30°	50
2°		35°	40
3°		40°	30
4°		45°	30
5°	2860	50°	20
6°		55°	10
7°		60°	10
8°		65°	10
9°		70°	10
10°	1960	75°	10
11°		80°	10
12°		85°	10
13°		90°	10
14°			
15°	810		
16°			
17°			
18°			
19°			
20°	250		

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	0	10	0			
室指数	照明率 (×0.01)																			
0.60	65	60	58	55	54	53	64	59	58	55	54	52	56	54	53	51	52	51	49	48
0.80	70	63	63	59	59	57	68	62	62	59	58	56	60	57	57	55	55	54	52	51
1.00	74	66	67	62	63	59	71	65	66	61	62	59	63	60	60	57	58	56	54	53
1.25	76	68	70	64	65	61	73	66	68	63	64	60	64	61	61	59	59	57	55	53
1.50	78	69	72	65	67	62	75	67	70	64	66	61	66	62	63	60	60	58	56	54
2.00	81	70	75	67	71	65	78	69	73	66	69	63	68	63	65	61	62	59	57	55
2.50	83	72	78	69	74	66	80	70	75	67	71	65	70	65	67	63	63	61	59	56
3.00	85	73	80	70	76	68	81	71	77	69	74	67	72	66	69	64	65	62	60	58
4.00	87	74	84	72	81	71	84	73	80	71	78	69	74	68	72	67	67	64	62	60
5.00	89	75	86	74	84	73	85	74	83	72	80	71	76	69	75	69	69	66	64	61
10.00	93	78	92	77	91	77	89	76	88	76	87	76	80	73	80	72	74	69	68	65

