

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHTP-31610 (K) -PR17

光源	名 称	コンパクト形蛍光ランプ
	形 名	FHP32EN
	光 束	2600 lm × 1

前 面	開放
反射面	アルミ半鏡面仕上げ

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	0 %
	F 	63 %
	F 	63 %
	器具光束	1630 lm

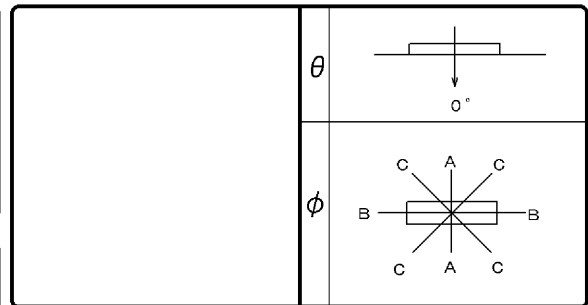

最大取付間隔	
A-A	1.5 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	203	203	203
10°	217	202	210
20°	228	191	217
30°	215	174	208
40°	188	149	184
50°	149	118	148
60°	93	83	104
70°	38	47	49
80°	4	15	10
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		40	37	31	29	26	25	39	36	30	29	25	25	29	28	25	24	24	24	21	20		
0.80		48	43	39	37	33	32	46	42	38	36	33	32	37	35	32	31	32	31	28	27		
1.00		52	47	44	41	38	36	51	46	43	40	38	36	41	39	37	35	36	35	32	31		
1.25		57	51	49	45	44	41	56	50	48	45	43	41	46	44	42	40	41	39	37	36		
1.50		61	53	53	48	48	44	59	52	52	48	47	44	50	46	45	43	44	43	40	39		
2.00		66	57	59	53	54	50	64	56	58	52	53	49	55	51	51	48	49	48	45	44		
2.50		69	59	63	56	58	53	66	58	61	55	57	52	58	54	55	51	53	50	48	47		
3.00		71	61	66	58	62	55	68	60	64	57	60	54	60	56	57	53	55	53	51	49		
4.00		74	62	70	60	66	58	71	62	67	59	64	57	63	58	61	56	58	55	54	52		
5.00		75	64	72	62	69	60	72	63	69	61	67	59	65	59	63	58	60	57	55	54		
10.00		79	66	77	65	75	64	76	65	74	64	72	63	69	62	68	62	64	60	59	58		

