


# 東芝ランプ 配光データシート

名称	ビームランプ
形名	BRF110V120W
光束	1360 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

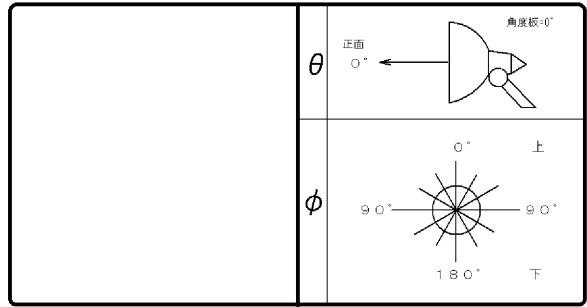

効率	F		%
	F		%
	F	100	%
	器具光束	1360	lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	3088		
10°	2279		
20°	977		
30°	375		
40°	146		
50°	45		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0						
	壁	70	50	30	70	50	30	70	50	30	50	30	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0	0	0	0
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0	0	0	0
室指数	照明率 (×0.01)																													
0.60	108	99	96	92	89	87	106	98	95	91	89	86	94	90	88	86	87	86	83	81										
0.80	118	107	107	100	100	96	116	106	106	100	99	95	103	99	98	95	96	94	91	90										
1.00	126	113	115	107	108	102	123	121	121	114	106	107	102	111	105	105	101	103	101	98	96									
1.25	131	116	121	111	111	114	107	128	115	119	110	112	106	115	109	110	105	107	104	101	100									
1.50	135	119	125	114	118	110	131	117	123	113	116	109	119	111	113	108	110	107	104	103										
2.00	140	122	131	117	125	114	136	120	129	116	123	113	123	115	118	121	115	110	108	106										
2.50	143	124	136	120	130	117	139	122	133	119	127	116	127	117	122	114	118	113	111	109										
3.00	146	125	139	122	134	119	142	124	136	121	131	118	129	119	125	117	120	115	113	111										
4.00	150	127	144	125	140	123	145	126	140	124	136	122	133	122	130	120	124	118	116	114										
5.00	152	129	148	127	144	125	147	127	143	126	140	124	135	123	133	122	126	120	118	116										
10.00	157	131	155	131	154	131	152	130	150	130	149	129	141	127	140	127	132	125	123	121										

