


東芝ランプ 配光データシート

名称	クールビーム
形名	CRS110V60WN
光束	500 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

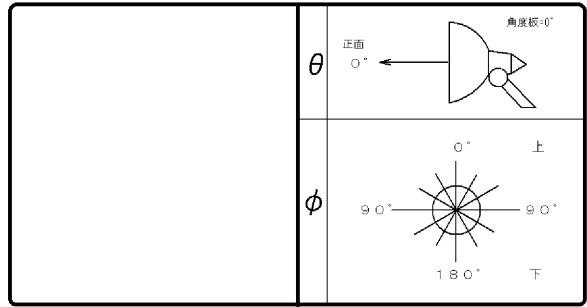

効率	F		%
	F		%
	F	100	%
	器具光束	500	lm

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	9000		
10°	3080		
20°	800		
30°	230		
40°	71		
50°	0		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	30	10	0	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	照明率 (×0.01)																								
0.60	122	121	121	106	105	102	120	121	111	106	105	102	109	105	104	101	103	101	99	98					
0.80	131	119	120	131	141	09	128	118	119	131	131	09	171	121	121	08	101	08	106	104					
1.00	137	123	127	181	20	14	34	22	26	17	19	14	23	16	17	13	15	12	11	09					
1.25	141	125	131	20	24	16	38	24	29	19	23	16	25	18	20	15	18	14	12	10					
1.50	143	126	134	22	27	18	40	25	32	21	26	18	27	19	22	17	19	15	13	12					
2.00	148	129	139	24	33	21	44	27	36	24	30	20	31	22	26	19	22	18	15	13					
2.50	151	130	143	27	37	24	47	29	40	26	35	23	34	24	29	21	25	20	17	16					
3.00	154	132	147	29	41	26	49	30	43	28	38	25	36	26	33	23	27	22	20	18					
4.00	158	134	152	32	48	30	53	33	48	31	44	29	40	28	37	27	31	25	23	21					
5.00	160	136	156	34	53	33	55	34	52	33	48	32	43	31	41	30	34	28	26	24					
10.00	166	139	165	39	64	39	60	38	59	38	58	38	50	35	49	35	41	33	32	30					

