


東芝ランプ 配光データシート

名称	クールビーム
形名	CRF110V120W
光束	1200 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

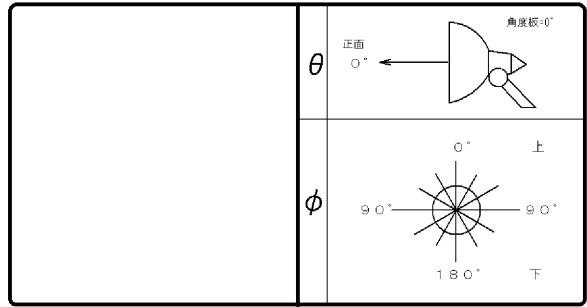

効率	F	%
	F	%
	F	100 %
	器具光束	1200 lm

最大取付間隔	
A-A	0.4 H
B-B	0.4 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	3167		
10°	1953		
20°	781		
30°	291		
40°	107		
50°	54		
60°	18		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10	10	0
室指数	照明率 (×0.01)																			
0.60	91	84	81	77	75	73	90	83	80	77	75	73	79	76	74	72	73	72	69	68
0.80	100	91	90	85	84	80	98	90	89	84	83	80	87	83	82	80	81	79	77	76
1.00	106	95	97	90	91	86	104	95	96	90	90	86	93	88	88	85	87	85	82	81
1.25	111	98	102	93	96	90	108	97	100	93	94	89	97	91	92	88	90	88	85	84
1.50	114	100	105	96	99	92	111	99	104	95	98	92	100	94	95	91	93	90	88	86
2.00	118	103	111	99	105	96	115	102	109	98	103	95	104	97	100	94	97	93	91	89
2.50	121	105	115	102	110	99	118	104	112	101	107	98	107	99	103	97	99	95	93	92
3.00	124	106	118	103	113	101	120	105	115	102	111	100	109	101	106	99	102	97	95	94
4.00	127	108	122	106	118	104	123	107	119	105	115	103	113	103	110	102	105	100	98	97
5.00	129	109	125	108	122	106	125	108	122	107	119	105	115	105	113	104	107	102	100	99
10.00	134	112	132	111	131	111	129	111	128	110	126	110	120	108	119	108	121	106	105	103

