


東芝照明器具配光データシート

名称	HID埋込ダウンライト
形名	DD-10102MK-PD9

保守率	良	0.72
	中	0.68
	否	0.60

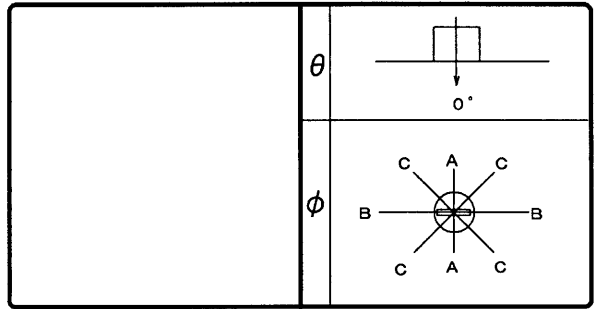

光源	名称	ネオセラ
	形名	MT100FCHE-W
	光束	11000 lm x 1

効率	F	0%
	F	72%
	F	72%
	器具光束	7960 lm

最大取付間隔	
A-A	1.0 H
B-B	0.7 H

備考
ネオセラ100W フロスト

前面	下面開放
反射面	梨地処理

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	400	400	400
10°	357	357	368
20°	298	246	290
30°	240	188	218
40°	220	170	195
50°	221	142	203
60°	121	73	104
70°	28	21	25
80°	1	2	2
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0	10	0	
0.60	46	42	36	34	30	29	45	42	35	34	30	29	34	33	29	28	29	28	25	24
0.80	54	49	45	42	38	36	53	48	44	41	38	36	42	40	37	36	36	35	32	31
1.00	62	55	52	48	45	43	60	54	51	48	45	43	49	46	44	42	43	42	38	37
1.25	67	59	58	53	52	48	65	58	57	53	51	48	54	51	49	47	48	47	44	42
1.50	71	63	63	57	57	53	69	62	61	56	56	52	59	55	54	51	52	51	48	46
2.00	77	67	70	62	64	59	74	66	68	62	63	58	65	60	61	57	58	56	54	52
2.50	80	69	74	65	69	62	77	68	72	65	67	62	68	63	65	61	62	60	57	56
3.00	83	71	77	68	73	65	80	70	75	67	71	64	71	65	68	63	65	62	60	59
4.00	86	73	81	70	77	68	83	72	79	69	75	67	74	68	72	66	68	65	63	62
5.00	87	74	84	72	80	70	84	73	81	71	78	69	76	70	74	68	70	67	65	64
10.00	91	76	89	75	87	74	88	75	86	74	84	73	80	73	79	72	75	71	69	68

