


東芝照明器具配光データシート

名称	ネオセラバラスト付ランプホルダー
形名	CHE-25101-P M2+ZC-403G

保守率	良	0.68
	中	0.64
	否	0.60

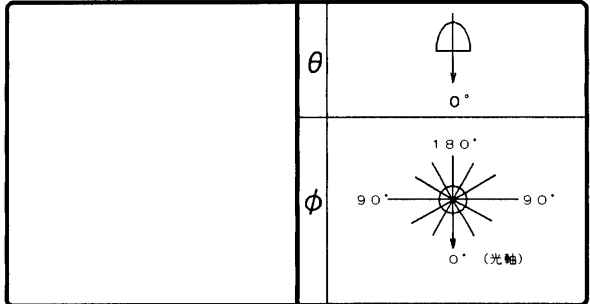

光源	名称	ネオセラランプ
	形名	MF250CHE-W
	光束	27000 lm x 1

効率	F	1%
	F	67%
	F	68%
	器具光束	18437 lm

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

前面	強化ガラス付ガード
反射面	T-ブライツ (増反射膜)

光度 (cd/1000lm)			
θ \ ϕ	A-A	B-B	C-C
0°	483		
10°	514		
20°	567		
30°	339		
40°	150		
50°	42		
60°	11		
70°	8		
80°	6		
90°	1		
100°	0		
110°	1		
120°	1		
130°	1		
140°	2		
150°	3		
160°	4		
170°	4		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	照明率 (x0.01)																							
0.60	53	49	45	43	40	39	52	48	45	43	40	39	44	42	40	39	39	38	36	35				
0.80	60	54	52	49	48	46	58	54	52	49	47	45	50	48	46	45	45	44	42	41				
1.00	65	59	58	54	53	51	64	58	57	54	53	50	56	53	52	50	51	49	47	46				
1.25	69	62	63	57	58	54	68	61	62	57	57	54	59	56	56	53	54	53	51	50				
1.50	72	64	66	60	61	57	70	63	65	59	61	57	62	58	59	56	57	55	53	52				
2.00	76	66	71	63	67	61	74	65	69	63	65	60	66	61	63	59	61	58	57	56				
2.50	78	68	74	65	70	63	76	67	72	64	68	62	68	63	66	61	63	60	59	58				
3.00	80	69	76	66	72	65	77	68	74	66	71	64	70	64	67	63	65	62	60	59				
4.00	82	70	79	68	76	67	79	69	76	67	74	66	72	66	70	65	67	64	62	61				
5.00	84	71	81	69	78	68	81	70	78	68	76	67	73	67	72	66	68	65	63	62				
10.00	86	72	85	71	83	71	83	71	82	71	80	70	76	69	75	68	71	67	66	65				

