


東芝照明器具配光データシート

名称	ネオセラバラスト付ランプホルダー
形名	CHE-25101-P M2+ZG-404N

保守率	良	0.72
	中	0.68
	否	0.60

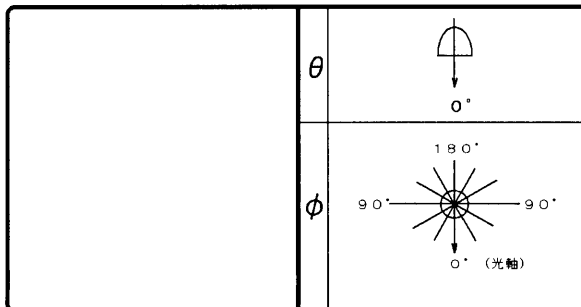

光源	名称	ネオセラランプ
	形名	MF250CHE-W
	光束	27000 lm x 1

効率	F	1%
	F	72%
	F	73%
	器具光束	19724 lm

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考	
----	--

前面	枠付格子ガード
反射面	T-ブライト (増反射膜)

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		504	
10°		532	
20°		597	
30°		358	
40°		161	
50°		44	
60°		14	
70°		13	
80°		8	
90°		1	
100°		1	
110°		1	
120°		1	
130°		2	
140°		2	
150°		3	
160°		5	
170°		5	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0		
	室指数	照 明 率 (x0.01)																							
	0.60	56	52	48	45	43	41	55	51	47	45	42	41	46	44	42	41	41	41	40	38	37			
	0.80	64	58	55	52	50	48	62	57	55	52	50	48	53	51	49	47	48	47	45	43				
	1.00	70	62	62	57	57	54	68	62	61	57	56	53	59	56	55	53	54	52	50	49				
	1.25	74	66	67	61	61	58	72	65	65	60	61	57	63	59	59	56	57	56	54	52				
	1.50	77	68	70	64	65	61	75	67	69	63	64	60	66	62	62	59	60	58	56	55				
	2.00	81	71	75	67	71	65	79	70	73	67	69	64	70	65	67	63	64	62	60	59				
	2.50	84	72	78	69	74	67	81	71	76	69	73	66	73	67	70	65	67	64	62	61				
	3.00	85	73	81	71	77	69	83	72	79	70	75	68	74	68	72	67	69	66	64	63				
	4.00	88	75	84	73	81	71	85	74	81	72	79	70	77	70	75	69	71	68	66	65				
	5.00	89	75	86	74	83	72	86	74	83	73	81	72	78	71	76	70	72	69	67	66				
	10.00	92	77	91	76	89	76	89	76	87	75	86	75	82	74	80	73	76	71	70	69				

