


東芝照明器具配光データシート

名称	ネオセラバラスト付ランプホルダー
形名	CHE-25101-P M2+ZG-413N

保守率	良	0.72
	中	0.68
	否	0.60

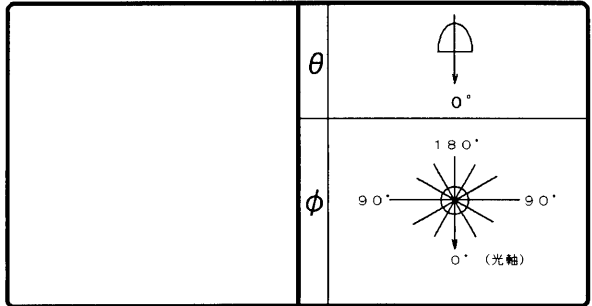

光源	名称	ネオセラランプ
	形名	MF250CHE-W
	光束	27000 lm x 1

効率	F	1%
	F	76%
	F	77%
	器具光束	20675 lm

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考	
----	--

前面	ガード
反射面	T-ブライト (増反射膜)

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	563		
10°	574		
20°	635		
30°	372		
40°	177		
50°	57		
60°	9		
70°	7		
80°	4		
90°	1		
100°	0		
110°	1		
120°	1		
130°	1		
140°	2		
150°	2		
160°	4		
170°	4		
180°	0		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70		50		30		70		50		30		50		30		10	0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	照 明 率 (x0.01)																			
0.60	59	55	51	48	45	44	58	54	50	48	45	44	49	47	44	43	44	43	41	39
0.80	67	61	59	55	53	51	66	60	58	55	53	51	56	54	52	50	51	50	48	46
1.00	74	66	66	61	60	57	72	65	65	60	60	57	63	59	58	56	57	56	53	52
1.25	78	69	71	65	65	61	76	68	69	64	64	61	67	63	63	60	61	59	57	56
1.50	81	72	74	68	69	64	79	71	73	67	68	64	70	66	66	63	64	62	60	59
2.00	86	74	80	71	75	68	83	73	78	70	74	68	74	69	71	67	69	66	64	63
2.50	88	76	83	73	79	71	85	75	81	73	77	70	77	71	74	69	71	68	66	65
3.00	90	77	85	75	81	73	87	76	83	74	80	72	79	72	76	71	73	70	68	67
4.00	92	79	89	77	85	75	89	78	86	76	83	74	81	74	79	73	75	72	70	69
5.00	94	79	91	78	88	76	91	78	88	77	85	76	83	75	81	74	77	73	71	70
10.00	97	81	95	80	94	79	93	80	92	79	90	79	86	78	85	77	80	75	74	73

