


東芝照明器具配光データシート

名称	ネオセラバラスト付ランプホルダー
形名	CHE-25101-D PM2+ZC-403N

保守率	良	0.68
	中	0.64
	否	0.60

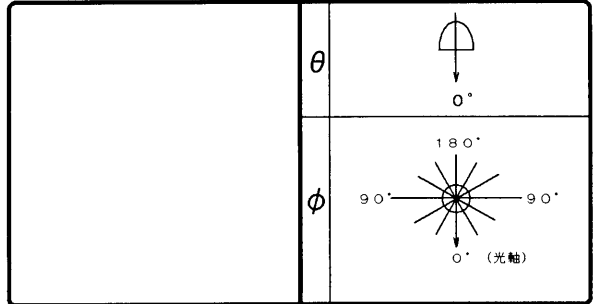

光源	名称	ネオセラランプ
	形名	MF250CHE-W
	光束	27000 lm × 1

効率	F	1%
	F	72%
	F	73%
	器具光束	19702 lm

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考	
----	--

前面	ガラス (クリアー)
反射面	T-ブライト (増反射膜)

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	537		
10°	562		
20°	631		
30°	373		
40°	164		
50°	38		
60°	7		
70°	3		
80°	2		
90°	1		
100°	0		
110°	1		
120°	1		
130°	1		
140°	2		
150°	3		
160°	5		
170°	5		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0					
	壁	床	70		50		30		70		50		30		50		30		30		10		0	
			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室指数	照 明 率 (×0.01)																							
0.60	57	53	49	47	44	43	56	52	49	46	44	43	48	46	43	42	43	42	40	39				
0.80	65	59	57	53	52	50	63	58	56	53	52	50	55	52	51	49	50	49	46	45				
1.00	71	64	63	59	58	55	69	63	62	58	58	55	61	57	57	55	55	54	52	51				
1.25	75	67	68	62	63	59	73	66	67	62	62	59	64	61	61	58	59	57	55	54				
1.50	78	69	72	65	67	62	76	68	70	64	66	62	67	63	64	61	62	60	58	57				
2.00	82	71	76	68	72	66	80	70	75	68	71	65	71	66	68	64	66	63	62	60				
2.50	84	73	79	70	76	68	82	72	77	69	74	67	74	68	71	66	68	65	64	62				
3.00	86	74	82	72	78	70	83	73	80	71	76	69	75	69	73	68	70	67	65	64				
4.00	88	75	85	73	82	72	85	74	82	72	79	71	78	71	75	70	72	69	67	66				
5.00	90	76	87	74	84	73	86	75	84	74	82	72	79	72	77	71	73	70	68	67				
10.00	92	77	91	77	89	76	89	76	88	76	86	75	82	74	81	73	76	72	71	69				

