

東芝照明器具配光データシート

名称 ネオセラバラスト付ランプホルダー

形名 CHE-25101-D
PM2+ZG-413N

名称 ネオセラランプ

形名 MF250CHE-W


光束 27000 lm × 1

前面 ガード

反射面 T-ブライト (増反射膜)

保守率	良	0.72
	中	0.68
	否	0.60

効率	F	1%
	F	76%
	F	77%
	器具光束	20675 lm

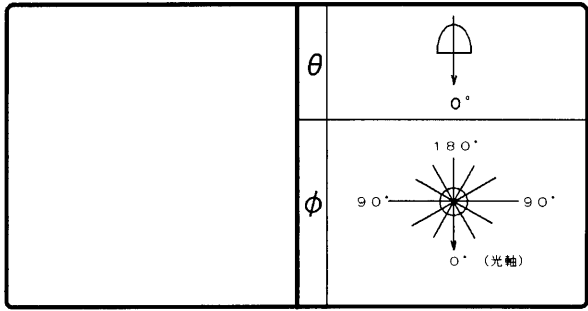

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		563	
10°		574	
20°		635	
30°		372	
40°		177	
50°		57	
60°		9	
70°		7	
80°		4	
90°		1	
100°		0	
110°		1	
120°		1	
130°		1	
140°		2	
150°		2	
160°		4	
170°		4	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照明率 (×0.01)																							
0.60		59	55	51	48	45	44	58	54	50	48	45	44	49	47	44	43	44	43	41	39				
0.80		67	61	59	55	53	51	66	60	58	55	53	51	56	54	52	50	51	50	48	46				
1.00		74	66	66	61	60	57	72	65	65	60	60	57	63	59	58	56	57	56	53	52				
1.25		78	69	71	65	65	61	76	68	69	64	64	61	67	63	63	60	61	59	57	56				
1.50		81	72	74	68	69	64	79	71	73	67	68	64	70	66	66	63	64	62	60	59				
2.00		86	74	80	71	75	68	83	73	78	70	74	68	74	69	71	67	69	66	64	63				
2.50		88	76	83	73	79	71	85	75	81	73	77	70	77	71	74	69	71	68	66	65				
3.00		90	77	85	75	81	73	87	76	83	74	80	72	79	72	76	71	73	70	68	67				
4.00		92	79	89	77	85	75	89	78	86	76	83	74	81	74	79	73	75	72	70	69				
5.00		94	79	91	78	88	76	91	78	88	77	85	76	83	75	81	74	77	73	71	70				
10.00		97	81	95	80	94	79	93	80	92	79	90	79	86	78	85	77	80	75	74	73				

