

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHD-11016-P N9

光源	名称	コンパクト形蛍光ランプ
	形名	FHT16EX-L
	光束	1200 lm × 1

前 面	下面開放
反射面	銀色鏡面仕上げ

保守率	良	0.66
	中	0.63
	否	0.55

効 率	F 	0 %
	F 	61 %
	F 	61 %
	器具光束	731 lm

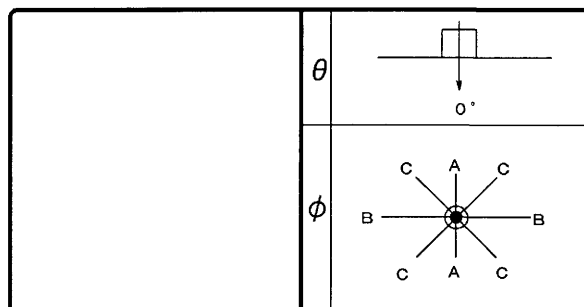

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	344		
10°	351		
20°	316		
30°	279		
40°	211		
50°	95		
60°	24		
70°	10		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		46	42	38	37	34	33	45	41	38	36	34	33	37	36	33	33	33	32	30	29		
0.80		54	49	47	44	42	41	52	48	46	43	42	40	45	43	41	40	41	40	38	37		
1.00		57	51	51	47	46	44	56	51	50	47	46	44	48	46	45	43	44	43	41	40		
1.25		61	54	55	51	51	48	60	54	54	50	50	47	52	49	49	47	48	46	44	44		
1.50		64	56	58	53	54	50	62	55	57	52	53	50	55	51	52	49	50	49	47	46		
2.00		68	59	63	56	59	54	66	58	62	56	58	54	59	55	56	53	54	52	51	50		
2.50		70	60	66	58	62	56	68	60	64	57	61	56	61	56	59	55	56	54	53	52		
3.00		71	61	68	59	65	58	69	61	66	59	63	57	63	58	60	56	58	55	54	53		
4.00		73	62	70	61	68	59	71	62	68	60	66	59	65	59	63	58	60	57	56	55		
5.00		75	63	72	62	70	61	72	62	70	61	68	60	66	60	64	59	61	58	57	56		
10.00		77	64	75	64	74	63	74	64	73	63	72	62	68	62	67	61	63	60	59	58		

