

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHD-11910-P N9

光 源	名称	コンパクト形蛍光ランプ
	形名	FHT16EX-L
	光束	1200 lm × 1

前 面	ガラス (クリアー)
反射面	銀色鏡面仕上げ

良	0.63
中	0.59
否	0.55

効 率	F 	0 %
	F 	49 %
	F 	49 %
	器具 光束	582 lm

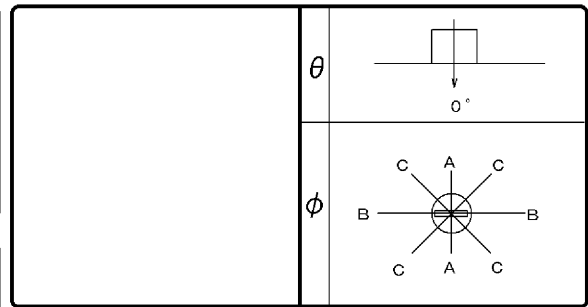

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備 考	
-----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	167	167	167
10°	168	164	167
20°	165	167	169
30°	177	170	176
40°	169	153	162
50°	130	110	127
60°	73	51	63
70°	8	8	8
80°	5	7	5
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50				30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数		照 明 率 (×0.01)																			
0.60		31	29	25	24	21	20	31	28	24	23	21	20	24	23	20	20	20	20	18	17
0.80		38	35	32	30	27	26	37	34	31	29	27	26	30	29	27	26	26	25	23	23
1.00		42	37	35	33	31	30	40	37	35	33	31	29	34	32	30	29	30	29	27	26
1.25		46	40	40	36	36	33	44	40	39	36	35	33	37	35	34	33	33	32	30	30
1.50		48	42	43	39	39	36	47	42	42	38	38	36	40	37	37	35	36	35	33	32
2.00		52	45	47	42	44	40	50	44	46	42	43	40	44	41	41	39	40	38	37	36
2.50		54	47	50	44	47	42	52	46	49	44	46	42	46	43	44	41	42	40	39	38
3.00		56	48	52	46	49	44	54	47	51	45	48	43	48	44	46	43	44	42	41	40
4.00		57	49	55	47	52	46	55	48	53	47	51	45	50	46	48	45	46	44	43	42
5.00		59	49	56	48	54	47	56	49	54	48	52	47	51	47	50	46	47	45	44	43
10.00		61	51	59	50	58	49	59	50	57	50	56	49	54	48	53	48	50	47	46	45

