

東芝照明器具配光データシート


名 称	蛍光灯埋込ダウンライト
形 名	FLD-2782NR (W) -ELB

光 源	名称	コンパクト形蛍光ランプ
	形名	FDL27EX-L
	光束	1550 lm × 1

前 面	カバー (乳白)
反射面	塗装 (白)

良	0.74
中	0.70
否	0.61

効 率	F	1 %
	F	18 %
	F	19 %
器具光束		285 lm

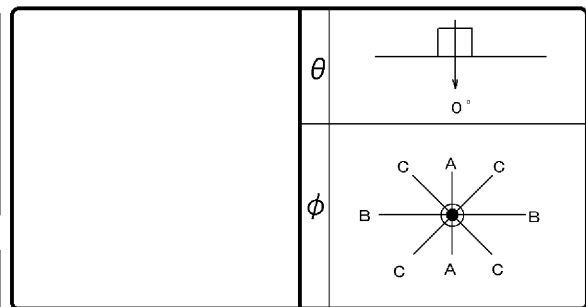

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備 考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	54	54	54
10°	52	54	54
20°	50	51	51
30°	46	46	47
40°	41	41	41
50°	36	33	35
60°	29	27	26
70°	23	20	18
80°	20	10	10
90°	5	3	15
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		11	10	8	7	6	6	10	9	8	7	6	6	7	7	6	6	6	5	4			
0.80		13	11	10	9	8	8	12	11	10	9	8	8	9	9	8	8	8	7	7	6		
1.00		14	13	11	10	9	9	13	12	11	10	9	9	10	10	9	9	9	8	8	7		
1.25		15	14	13	12	11	10	15	13	12	11	11	10	12	11	10	10	10	10	9	8		
1.50		16	14	14	13	12	11	16	14	13	12	12	11	13	12	11	11	11	10	10	9		
2.00		18	15	16	14	14	13	17	15	15	14	14	13	14	13	13	12	12	12	11	11		
2.50		19	16	17	15	15	14	18	16	16	15	15	13	15	14	14	13	13	13	12	11		
3.00		19	17	18	15	16	14	19	16	17	15	16	14	16	15	15	14	14	13	13	12		
4.00		20	17	19	16	18	15	19	17	18	16	17	15	17	15	16	15	15	14	14	13		
5.00		21	18	20	17	18	16	20	17	19	16	18	16	18	16	17	15	16	15	14	14		
10.00		22	18	21	18	21	17	21	18	20	18	20	17	19	17	18	17	17	16	16	15		

