


# 東芝照明器具配光データシート

名称	蛍光防犯灯
形名	FK-1861-GL1 5+CL-601

保守率	良	0.70
	中	0.66
	否	0.62


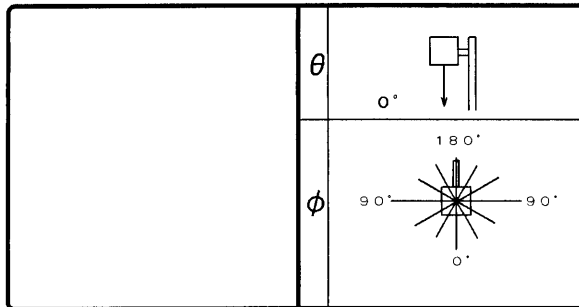


光源	名称	コンパクト形蛍光ランプ
	形名	FDL18EX-N
	光束	1070 lm × 1

効率	F $\frac{1}{2}$	5.5 %
	F $\frac{1}{4}$	54.3 %
	F $\bigcirc$	59.8 %
	器具光束	640 lm

備考  
後方カッターバ(CL-601)付

前面	グローブ (プリズム)
反射面	鏡面処理

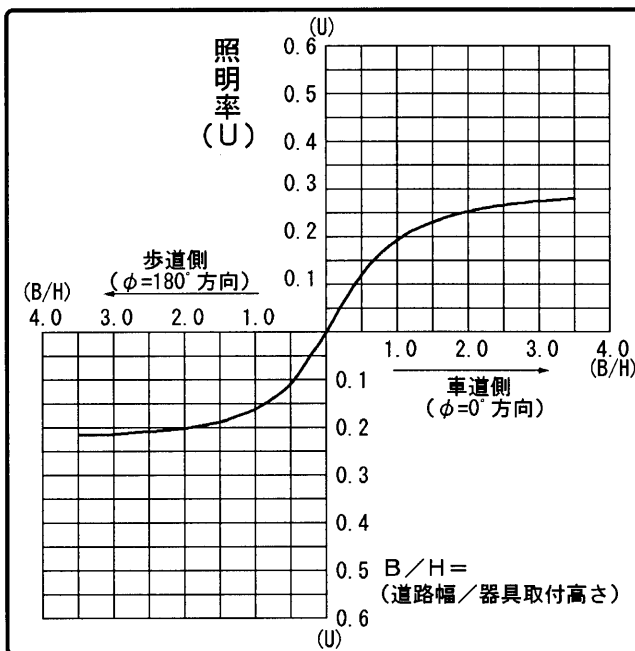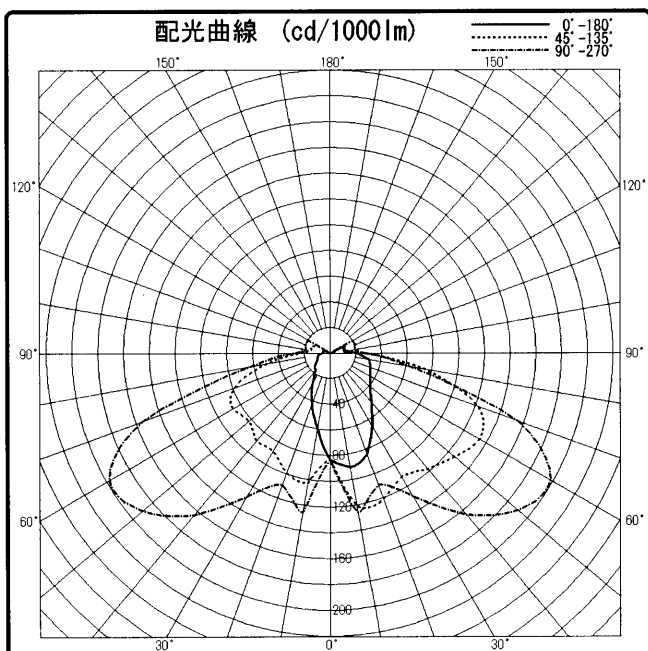

$\theta \setminus \phi$	0°	45°	90°	135°	180°
0°	83	83	83	83	83
10°	90	121	126	103	59
20°	84	121	109	99	42
30°	65	111	129	88	27
40°	50	118	164	89	18
50°	41	126	190	82	16
60°	36	134	198	87	12
70°	33	122	155	79	11
80°	31	76	63	52	10
90°	21	28	27	24	6
100°	11	13	19	15	6
110°	12	13	21	16	6
120°	10	13	20	12	6
130°	0	0	0	0	0
140°	0	0	0	0	0
150°	0	0	0	0	0
160°	0	0	0	0	0
170°	0	0	0	0	0
180°	0	0	0	0	0

