

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHD-31515Y-PD9

光源	名 称	コンパクト形蛍光ランプ
	形 名	FHT32EX-L
	光束	2400 lm × 1

前 面	下面開放
反射面	銀色鏡面仕上げ

保守率	良	0.66
	中	0.63
	否	0.55

効 率	F 	0 %
	F 	55 %
	F 	55 %
	器具光束	1313 lm

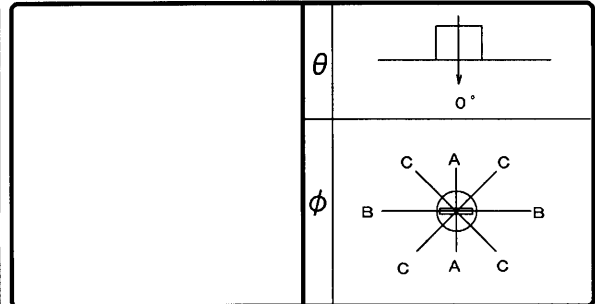

最大取付間隔		備考
A-A	1.4 H	
B-B	1.4 H	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	163	163	163
10°	188	175	188
20°	167	164	190
30°	148	151	155
40°	155	150	155
50°	156	132	148
60°	109	87	101
70°	27	21	22
80°	11	5	9
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		34	31	26	25	21	21	33	31	26	24	21	21	25	24	21	20	20	20	18	17		
0.80		41	37	33	31	28	27	40	37	33	31	28	27	32	30	27	27	27	26	24	23		
1.00		45	41	38	35	33	31	44	40	37	35	32	31	36	34	32	30	31	30	28	27		
1.25		50	44	43	39	38	35	48	43	42	39	37	35	40	38	36	35	35	34	32	31		
1.50		53	46	46	42	41	38	51	46	45	41	41	38	43	40	39	37	38	37	35	34		
2.00		57	50	52	46	47	43	55	49	50	46	46	43	48	45	45	42	43	41	39	38		
2.50		60	52	55	49	51	46	58	51	53	48	50	46	51	47	48	45	46	44	42	41		
3.00		62	53	57	50	54	48	60	52	56	50	53	48	53	49	50	47	48	46	44	43		
4.00		64	55	61	53	58	51	62	54	59	52	56	50	55	51	53	49	51	48	47	46		
5.00		66	55	63	54	60	52	63	55	61	53	58	52	57	52	55	51	52	50	49	47		
10.00		69	57	67	56	65	56	66	57	65	56	63	55	60	55	59	54	56	53	52	51		

