

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHR-21800-P H9

光源	名 称	蛍光ランプ
	形 名	FHF16EX-N-H
	光 束	2100 lm × 1

前 面	下面開放
反射面	塗装 (白)

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	0 %
	F 	82 %
	F 	82 %
	器具 光束	1728 lm

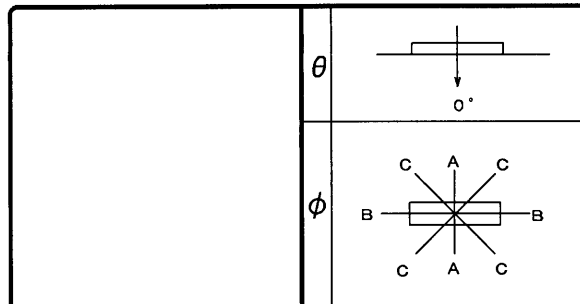

最大取付間隔		備考
A-A	1.3 H	
B-B	1.3 H	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	301	301	301
10°	291	298	299
20°	281	284	286
30°	261	261	265
40°	222	230	233
50°	159	190	186
60°	71	144	122
70°	44	90	47
80°	24	32	24
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		53	49	41	39	34	33	51	48	41	39	34	33	39	38	33	33	33	32	29	27		
0.80		63	57	52	49	44	43	61	56	51	48	44	42	49	47	43	42	42	41	38	36		
1.00		69	62	58	54	51	48	67	61	57	53	50	48	55	52	49	47	48	46	43	41		
1.25		75	67	65	60	58	54	73	66	64	59	57	54	61	57	55	53	54	52	48	47		
1.50		80	70	70	63	63	58	77	69	68	63	62	58	65	61	60	57	58	56	53	51		
2.00		86	75	78	70	71	65	83	74	76	69	70	64	72	67	67	63	65	62	59	58		
2.50		90	78	83	73	76	69	87	76	80	72	75	68	76	70	72	67	69	66	63	62		
3.00		93	80	86	76	81	72	90	78	84	75	79	71	79	73	75	70	72	69	66	65		
4.00		96	82	91	79	86	76	93	81	88	78	84	75	83	76	80	74	76	73	70	69		
5.00		99	83	94	81	90	78	95	82	91	80	87	78	86	78	83	76	79	75	73	71		
10.00		103	86	101	85	98	83	99	85	97	84	95	83	91	82	89	81	84	79	78	76		

