


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FHR-41800-P N9

保守率	良	0.73
	中	0.69
	否	0.61

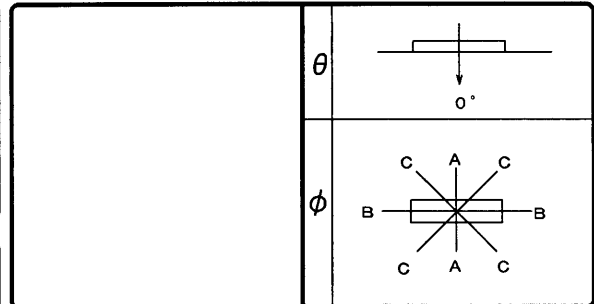

光源	名 称	蛍光ランプ
	形 名	FHF32EX-N-H
	光束	3520 lm × 1

効 率	F	0 %
	F	85 %
	F	85 %
	器具 光束	2985 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

前 面	下面開放
反射面	塗装 (白)

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	310	310	310
10°	300	307	308
20°	289	292	295
30°	269	269	273
40°	229	237	240
50°	164	196	192
60°	73	148	126
70°	45	93	48
80°	25	33	25
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		54	50	43	40	35	34	53	49	42	40	35	34	41	39	34	34	34	33	30	28		
0.80		65	59	53	50	46	44	63	58	52	49	45	44	51	48	44	43	44	43	39	37		
1.00		71	64	60	55	52	49	69	63	59	55	51	49	56	54	50	48	49	48	44	42		
1.25		78	69	67	61	59	56	75	68	66	61	58	55	63	59	57	54	55	54	50	48		
1.50		82	72	72	65	65	60	79	71	70	64	63	59	67	63	61	59	60	58	54	52		
2.00		89	77	80	72	73	67	86	76	78	71	72	66	74	69	69	65	67	64	61	59		
2.50		93	80	85	75	79	71	90	79	83	74	77	70	78	73	74	69	71	68	65	63		
3.00		96	82	89	78	83	74	92	81	86	77	81	74	82	75	78	72	74	71	68	67		
4.00		99	84	94	81	89	78	96	83	91	80	87	78	86	78	82	76	78	75	72	71		
5.00		102	86	97	83	93	81	98	85	94	82	90	80	88	80	85	78	81	77	75	73		
10.00		106	89	104	87	101	86	102	88	100	86	98	85	94	84	92	83	87	82	80	78		

