

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHT-54310-P N9

光源	名称	コンパクト形蛍光ランプ
	形名	FHP45EN
	光束	4350 lm × 4

前 面	下面開放
反射面	塗装 (白)

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	0 %
	F 	73 %
	F 	73 %
	器具 光束	12766 lm

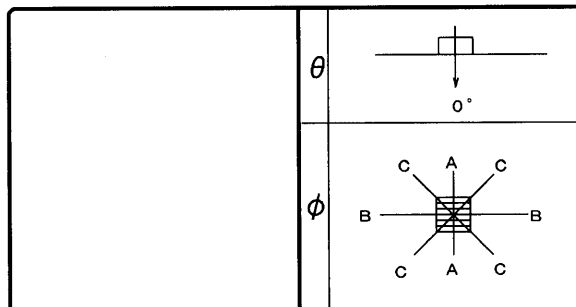

最大取付間隔	
A-A	1.4 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	245	245	245
10°	245	240	242
20°	242	228	235
30°	235	207	222
40°	218	179	204
50°	180	145	174
60°	119	107	128
70°	47	65	65
80°	7	22	9
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数		照 明 率 (×0.01)																						
0.60		46	42	35	34	29	28	45	41	35	33	29	28	34	32	28	28	28	27	24	23			
0.80		55	50	45	42	38	37	54	49	44	41	38	36	42	41	37	36	36	35	32	31			
1.00		61	54	51	47	44	42	59	53	50	46	43	41	48	45	42	41	41	40	37	35			
1.25		67	59	57	52	50	47	64	58	56	52	50	47	53	50	48	46	47	45	42	41			
1.50		70	62	61	56	55	51	68	61	60	55	54	51	57	54	52	50	51	49	46	44			
2.00		77	67	69	62	63	57	74	65	67	61	62	57	64	59	59	56	57	55	52	51			
2.50		80	69	73	65	68	61	77	68	71	64	66	61	68	62	64	60	61	59	56	54			
3.00		83	71	77	67	72	64	80	70	74	66	70	63	70	65	67	62	64	61	59	57			
4.00		86	73	81	70	77	68	83	72	79	69	75	67	74	68	71	66	68	65	63	61			
5.00		88	74	84	72	80	70	85	73	81	71	78	69	76	70	74	68	70	67	65	63			
10.00		92	77	90	76	88	74	89	76	87	75	85	74	81	73	80	72	75	71	70	68			

