

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHT-54311-P N9

光源	名 称	コンパクト形蛍光ランプ
	形 名	FHP45EN
	光 束	4350 lm × 4

前 面	バツフル (白)
反射面	塗装 (白)

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	0 %
	F 	70 %
	F 	70 %
	器具 光束	12158 lm

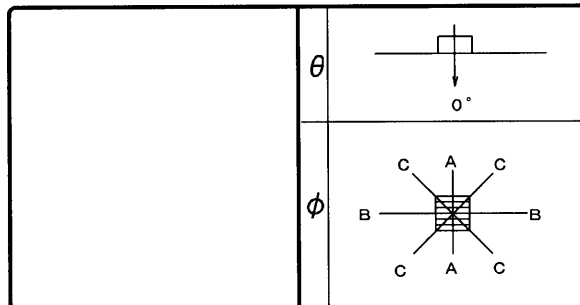

最大取付間隔	
A-A	1.5 H
B-B	1.3 H

備考	FHP45 4灯用 現行器具 新安定器載せ替え
----	----------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	207	207	207
10°	207	204	207
20°	207	194	202
30°	204	177	193
40°	193	153	179
50°	169	124	158
60°	133	90	125
70°	85	54	83
80°	34	19	30
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		照 明 率 (×0.01)																						
0.60		42	39	32	30	26	25	41	38	31	30	25	25	30	29	25	24	25	24	21	20			
0.80		51	46	40	38	34	32	49	45	40	37	33	32	38	36	33	32	32	31	28	27			
1.00		56	50	46	43	39	37	54	49	45	42	39	37	43	41	38	36	37	36	32	31			
1.25		62	55	52	48	45	42	59	54	51	47	44	42	49	46	43	41	42	41	37	36			
1.50		65	57	56	51	50	46	63	56	55	50	49	46	52	49	47	45	46	44	41	39			
2.00		71	62	63	57	57	52	69	61	62	56	56	52	59	54	54	51	52	50	47	46			
2.50		75	64	68	60	62	56	72	63	66	59	61	56	62	58	58	54	56	53	51	49			
3.00		77	66	71	62	66	59	75	65	69	62	64	58	65	60	61	57	59	56	54	52			
4.00		81	69	76	66	71	63	78	68	73	65	70	62	69	63	66	61	63	60	58	56			
5.00		83	70	79	67	75	65	80	69	76	67	73	64	71	65	69	63	65	62	60	59			
10.00		87	73	85	71	83	70	84	72	82	71	80	69	76	69	75	68	71	67	65	64			

