


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FHR-41963K-PH9

保守率	良	0.73
	中	0.69
	否	0.61

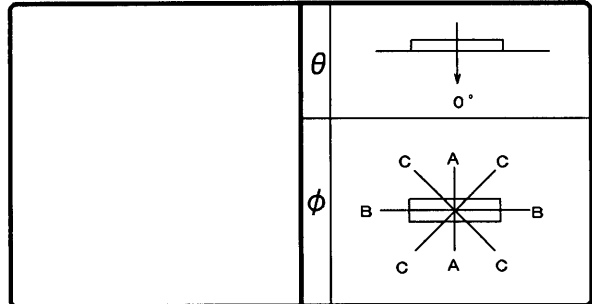

光源	名称	蛍光ランプ
	形名	FHF32EX-N-H
	光束	4950 lm × 1

効 率	F	0 %
	F	66 %
	F	66 %
	器具 光束	3273 lm

最大取付間隔	
A-A	1.4 H
B-B	1.2 H

前 面	ルーバー (アルミ・V)
反射面	塗装 (白)

備考	
----	--

光度 (cd/1000lm)				反射率 (%)	天井 壁 床	80						70						50						30		20	0				
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50		30		30		10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室指数						照 明 率 (×0.01)																									
0.60						49	45	41	39	36	35	48	44	40	38	36	35	39	38	35	34	35	34	35	34	32	31				
0.80						58	52	50	47	45	43	56	51	49	46	45	43	48	46	44	43	43	42	40	39						
1.00						62	56	55	51	50	47	60	55	54	50	49	47	52	49	48	47	47	46	44	43						
1.25						66	59	60	55	55	52	65	58	59	54	54	51	57	53	53	51	52	50	48	47						
1.50						69	61	63	57	59	54	67	60	62	57	58	54	60	56	56	53	55	53	51	50						
2.00						74	64	69	61	64	59	72	63	67	61	63	58	64	60	61	58	59	57	55	54						
2.50						76	66	71	63	68	61	74	65	70	63	66	61	66	61	64	60	61	59	57	56						
3.00						78	67	74	65	70	63	75	66	72	64	69	62	68	63	66	61	63	60	59	58						
4.00						80	68	77	66	74	65	77	67	74	66	72	64	70	64	68	63	65	62	61	60						
5.00						81	69	78	67	76	66	78	68	76	66	74	65	71	65	70	64	66	63	62	61						
10.00						84	70	82	69	80	68	80	69	79	68	78	68	74	67	73	66	69	65	64	63						

