


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FHR-42961K-PN9

保守率	良	0.73
	中	0.69
	否	0.61

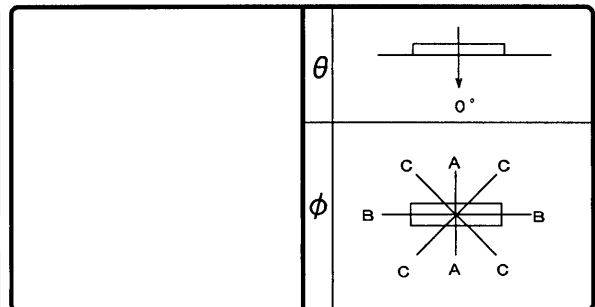

光源	名称	蛍光ランプ
	形名	FHF32EX-N-H
	光束	3520 lm × 2

効 率	F	0 %
	F	72 %
	F	72 %
	器具 光束	5083 lm

最大取付間隔	
A-A	1.2 H
B-B	1.6 H

前 面	ルーバー (アルミ・V)
反射面	塗装 (白)

備考	
----	--

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C			壁	70			50			30			70			50			30			50		30		10	0
							30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
				室指数	照 明 率 (×0.01)																									
0°				0.60	51	47	42	40	36	35	50	46	41	39	36	35	40	39	36	35	35	34	32	31						
10°				0.80	61	55	52	49	47	45	60	55	52	49	46	45	50	48	46	44	45	44	41	40						
20°				1.00	66	59	58	54	52	50	65	59	57	53	52	49	55	52	51	49	50	48	46	45						
30°				1.25	72	64	64	59	59	55	70	63	63	58	58	55	61	57	56	54	55	53	51	50						
40°				1.50	75	66	68	62	63	58	73	65	67	61	62	58	64	60	60	57	58	57	54	53						
50°				2.00	80	70	74	66	70	64	78	69	73	66	68	63	69	64	66	62	64	61	60	58						
60°				2.50	83	71	78	69	73	66	80	71	76	68	72	66	72	67	69	65	67	64	62	61						
70°				3.00	85	73	80	70	76	68	82	72	78	69	75	68	74	68	71	67	68	66	64	63						
80°				4.00	87	74	83	72	80	70	84	73	81	71	78	70	76	70	74	69	71	68	66	65						
90°				5.00	88	75	85	73	82	72	85	74	83	72	80	71	78	71	76	70	72	69	67	66						
100°				10.00	91	76	89	75	87	74	88	75	86	74	85	74	81	73	79	72	75	71	70	68						
110°																														
120°																														
130°																														
140°																														
150°																														
160°																														
170°																														
180°																														

