

東芝照明器具配光データシート


名 称	蛍光灯直付器具
形 名	FVH98889RP

光源	名 称	ネオスリムZプライド
	形 名	FHC34ED-PD+ 27ED-PD
	光束	7850 lm × 1

前 面	乳白アクリルカバー
反射面	塗装 (白)

保守率	良	0.69
	中	0.65
	否	0.61

効 率	F 	6 %
	F 	35 %
	F 	41 %
	器具 光束	3194 lm

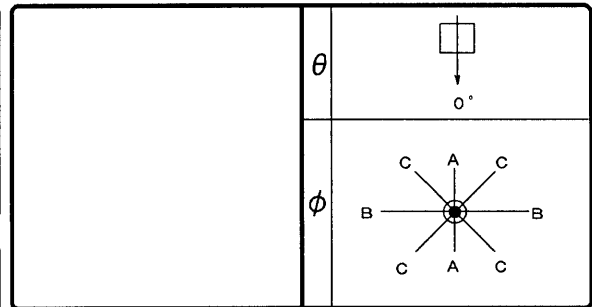

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	108		
10°	107		
20°	101		
30°	93		
40°	82		
50°	68		
60°	53		
70°	37		
80°	23		
90°	14		
100°	10		
110°	9		
120°	9		
130°	9		
140°	9		
150°	9		
160°	8		
170°	7		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		24	22	18	17	14	14	22	21	17	16	14	13	16	15	13	13	12	12	10	9		
0.80		28	26	22	21	18	18	27	25	22	20	18	17	20	19	17	17	16	16	14	13		
1.00		31	28	25	23	21	20	30	27	24	23	21	20	23	21	20	19	18	18	16	15		
1.25		34	30	29	26	25	23	32	29	27	25	24	22	25	24	22	21	21	20	18	17		
1.50		36	32	31	28	27	25	34	31	30	27	26	24	27	26	24	23	23	22	20	19		
2.00		39	34	35	31	31	28	37	33	33	30	30	28	31	28	28	26	26	25	23	21		
2.50		41	36	37	33	34	30	39	34	36	32	32	30	32	30	30	28	28	27	25	23		
3.00		43	37	39	34	36	32	41	35	37	33	34	31	34	31	32	30	29	28	26	25		
4.00		45	38	42	36	39	34	42	37	40	35	37	33	36	33	34	32	31	30	28	26		
5.00		46	39	43	37	41	36	43	38	41	36	39	35	37	34	36	33	33	31	29	28		
10.00		48	40	47	39	45	39	46	39	45	38	43	38	40	36	39	36	36	34	32	30		

