

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHR-54310-P J9

光源	名 称	コンパクト形蛍光ランプ
	形 名	FHP45EN
	光束	4350 lm × 4

前 面	下面開放
反射面	塗装（白）

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	0 %
	F 	67 %
	F 	67 %
	器具光束	11647 lm

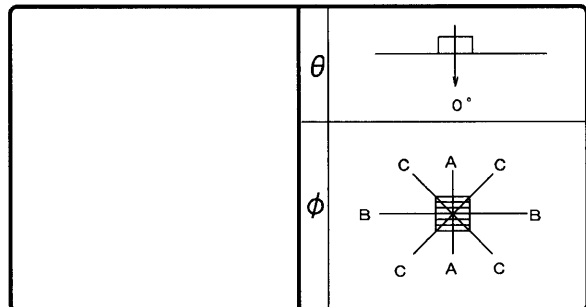

最大取付間隔		備考
A-A	1.4 H	
B-B	1.3 H	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	246	246	246
10°	246	242	245
20°	243	230	238
30°	233	209	224
40°	205	180	201
50°	146	144	163
60°	69	102	99
70°	23	59	34
80°	9	16	10
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		照 明 率 (×0.01)																						
0.60		43	40	34	32	28	28	42	39	34	32	28	27	33	31	28	27	27	27	24	23			
0.80		52	47	43	40	37	35	50	46	42	40	37	35	41	39	36	35	35	34	32	30			
1.00		57	51	48	45	42	40	55	50	47	44	42	40	45	43	41	39	40	39	36	35			
1.25		62	55	54	49	48	45	60	54	53	49	47	45	51	48	46	44	45	43	41	39			
1.50		65	58	58	52	52	48	63	57	56	52	51	48	54	51	50	47	48	47	44	43			
2.00		71	62	64	57	59	54	69	61	63	57	58	53	60	55	56	53	54	52	49	48			
2.50		74	64	68	60	63	57	71	63	66	59	62	57	63	58	59	56	57	55	52	51			
3.00		76	65	71	62	67	59	73	64	69	61	65	59	65	60	62	58	59	57	55	54			
4.00		79	67	75	65	71	62	76	66	72	64	69	62	68	62	66	61	63	60	58	57			
5.00		80	68	77	66	74	64	78	67	75	65	72	64	70	64	68	62	65	61	60	58			
10.00		84	70	82	69	80	68	81	69	79	68	78	67	74	67	73	66	69	65	64	62			

