


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FHD-41015-M D9

保守率	良	0.66
	中	0.63
	否	0.55

光源	名称	コンパクト形蛍光ランプ
	形名	FHT42EX-L
	光束	3200 lm × 1

効 率	F 	0 %
	F 	54 %
	F 	54 %
	器具 光束	1725 lm

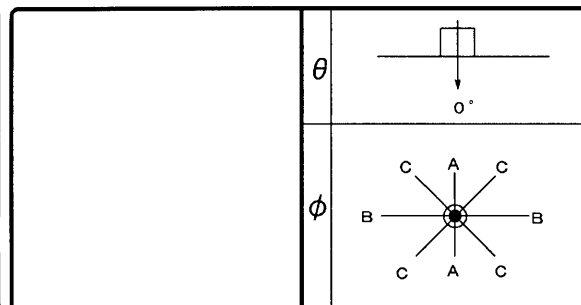

前 面	
反射面	銀色鏡面仕上げ

最大取付間隔		備考
A-A	1.3 H	
B-B	1.3 H	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	223		
10°	225		
20°	234		
30°	209		
40°	155		
50°	103		
60°	61		
70°	31		
80°	3		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
		壁		70		50		30		70		50		30		50		30		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0
室指数		照 明 率 (×0.01)																							
0.60		37	34	30	28	25	25	36	33	29	28	25	24	28	27	25	24	24	24	22	21				
0.80		44	40	37	34	32	31	43	39	36	34	32	31	35	33	31	30	31	30	28	27				
1.00		47	42	41	38	36	34	46	42	40	37	36	34	39	37	35	34	34	33	31	30				
1.25		51	46	45	41	40	38	50	45	44	41	40	38	42	40	39	37	38	37	35	34				
1.50		54	47	48	44	44	41	52	47	47	43	43	40	45	42	42	40	40	39	37	36				
2.00		58	50	53	47	49	45	56	50	52	47	48	44	49	46	46	44	45	43	41	40				
2.50		60	52	56	49	52	47	58	51	54	49	51	47	52	48	49	46	47	45	44	43				
3.00		62	53	58	51	55	49	60	52	56	50	53	48	53	49	51	47	49	47	45	44				
4.00		64	54	61	53	58	51	62	54	59	52	57	51	56	51	54	50	51	49	47	46				
5.00		65	55	63	54	60	52	63	54	61	53	58	52	57	52	55	51	53	50	49	48				
10.00		68	57	66	56	65	55	65	56	64	55	63	55	60	54	59	54	56	52	52	51				

