


■ 東芝ランプ 配光データシート

名 称	ネオハロビーム
形 名	JR12V50WF/K 5MEZ
光 束	870 lm × 1

保 守 率	良	0.91
	中	0.89
	否	0.84

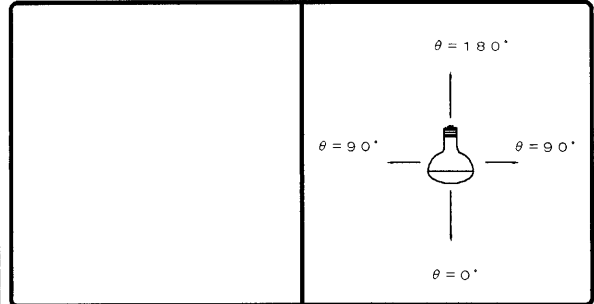

効 率	F	%
	F	%
	F	100 %
	器具 光束	870 lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備 考	
--------	--

光度 (cd/1000lm)			
0°	1264	25°	480
1°		30°	331
2°		35°	248
3°		40°	184
4°		45°	129
5°	1190	50°	92
6°		55°	67
7°		60°	57
8°		65°	40
9°		70°	29
10°	1034	75°	23
11°		80°	17
12°		85°	11
13°		90°	6
14°			
15°	845		
16°			
17°			
18°			
19°			
20°	632		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数		照 明 率 (×0.01)																						
0.60		75	69	63	60	56	55	73	68	63	60	56	54	61	58	55	54	54	53	49	48			
0.80		85	77	73	69	66	63	83	76	72	68	65	63	70	66	64	62	62	61	57	56			
1.00		93	83	82	76	74	70	90	82	80	75	73	70	77	73	71	68	69	67	64	62			
1.25		98	87	88	81	80	75	95	86	86	79	79	75	82	77	77	73	74	72	69	67			
1.50		103	90	93	84	85	79	99	89	91	83	84	79	86	81	81	77	78	76	72	70			
2.00		109	95	100	89	93	85	105	93	97	88	91	84	92	86	87	82	84	81	77	75			
2.50		112	97	105	93	98	89	108	95	102	91	96	88	96	89	91	86	87	84	81	78			
3.00		115	99	108	95	103	92	111	97	105	94	100	90	99	91	95	88	90	86	83	81			
4.00		119	101	113	98	108	95	114	99	109	97	105	94	102	94	99	92	94	89	87	84			
5.00		121	102	116	100	112	98	116	101	112	98	109	96	105	96	102	94	96	91	89	87			
10.00		126	105	124	104	121	103	121	104	119	103	117	102	110	100	109	99	102	96	94	92			

