

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHR-42575K-DBM

光源	名 称	蛍光ランプ
	形 名	FHF32EX-N-H
	光 束	4950 lm × 2

前 面	格子ルーバ (白)
反射面	塗装 (白)

保守率	良	0.69
	中	0.65
	否	0.61

効 率	F 	0 %
	F 	55 %
	F 	55 %
	器具光束	5396 lm

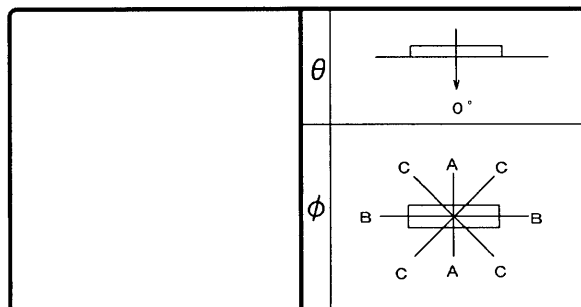

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	273	273	273
10°	256	263	264
20°	230	233	233
30°	198	195	194
40°	151	151	150
50°	99	103	102
60°	57	59	60
70°	32	34	32
80°	12	14	13
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		37	34	30	29	26	25	36	34	30	28	26	25	29	28	25	25	25	24	22	21		
0.80		44	40	37	35	33	31	43	39	36	34	32	31	35	34	32	31	31	30	28	27		
1.00		48	43	41	38	36	34	46	42	40	37	36	34	39	37	35	34	34	33	31	30		
1.25		52	46	45	41	40	38	50	45	44	41	40	38	42	40	39	37	38	37	35	34		
1.50		54	48	48	44	44	40	52	47	47	43	43	40	45	42	42	40	40	39	37	36		
2.00		58	51	53	47	49	45	56	50	52	47	48	44	49	46	46	44	45	43	41	40		
2.50		60	52	56	49	52	47	58	51	54	49	51	47	52	48	49	46	47	45	43	42		
3.00		62	53	58	51	55	49	60	52	56	50	53	48	53	49	51	47	49	47	45	44		
4.00		64	55	61	53	58	51	62	54	59	52	57	51	56	51	54	50	51	49	47	46		
5.00		66	55	63	54	60	52	63	55	61	53	59	52	57	52	56	51	53	50	49	48		
10.00		68	57	67	56	65	56	66	56	65	56	63	55	60	54	59	54	56	53	52	51		

