

# 東芝照明器具配光データシート


名称	蛍光灯器具
形名	FHT-42384NM- -PK9

光源	名称	蛍光ランプ
	形名	FHF32EX-N-H
	光束	4950 lm × 2

前面	
反射面	ステンレス+クリア 塗装

保守率	良	0.73
	中	0.69
	否	0.61

効率	F	16%
	F	59%
	F	75%
	器具 光束	7360 lm

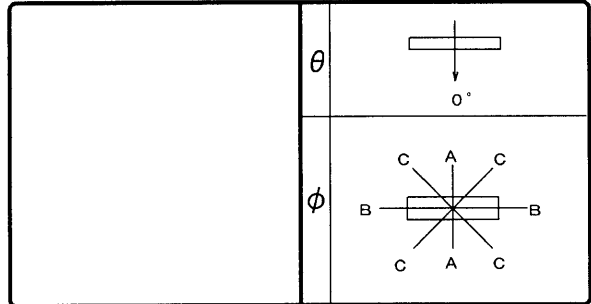

最大取付間隔	
A-A	1.4 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	143	143	143
10°	140	140	139
20°	136	132	131
30°	132	118	121
40°	133	101	112
50°	130	80	103
60°	129	56	93
70°	128	31	83
80°	116	12	80
90°	67	0	42
100°	61	0	36
110°	57	0	33
120°	56	0	37
130°	55	0	29
140°	42	0	15
150°	18	0	2
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80				70				50				30	20	0					
	壁	70	50	30		70	50	30		50	30			50	30						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10				
	室指数	照 明 率 (×0.01)																			
	0.60	40	37	29	28	23	22	38	35	28	27	22	21	26	25	20	20	19	18	15	13
	0.80	48	44	37	35	30	28	45	42	35	33	28	27	32	31	26	26	24	24	20	17
	1.00	53	48	42	39	34	33	50	45	40	37	33	32	36	34	31	29	28	27	23	20
	1.25	59	52	48	44	40	38	55	50	46	42	38	36	41	39	35	34	32	31	27	24
	1.50	62	55	52	47	44	41	59	52	49	45	42	40	44	42	39	37	35	34	30	27
	2.00	69	60	59	53	52	47	64	57	56	51	50	46	50	47	45	43	41	39	35	32
	2.50	72	62	64	56	57	51	68	60	60	54	54	50	54	50	49	46	45	43	38	35
	3.00	75	64	68	59	61	54	70	62	64	57	58	53	57	52	52	49	47	45	41	37
	4.00	79	67	73	63	67	59	74	64	68	60	63	57	61	56	57	53	51	49	45	41
	5.00	81	69	76	65	71	62	76	66	71	63	67	59	64	58	60	55	54	51	48	43
	10.00	87	72	83	70	80	68	81	70	78	68	76	66	70	63	67	61	60	57	54	49

