

東芝照明器具配光データシート


名 称	東芝白熱灯ダウンライト
形 名	ID-7391S (W)

光源	名 称	ミニクリプトンランプ
	形 名	KR100V54WW
	光束	810 lm × 1

前 面	
反射面	アルミ（銀色鏡面仕上、下部 パツフル・ホワイト）……

保守率	良	0.81
	中	0.77
	否	0.67

効 率	F	0 %
	F	65 %
	F	65 %
	器具 光束	530 lm

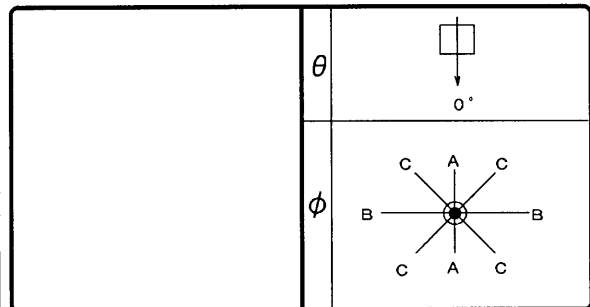

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	173		
10°	181		
20°	176		
30°	168		
40°	168		
50°	167		
60°	127		
70°	52		
80°	18		
90°	5		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		38	35	28	26	22	21	36	34	27	26	21	21	26	25	21	20	20	20	17	16		
0.80		45	41	35	33	29	28	44	40	34	32	28	27	33	31	28	27	27	26	23	22		
1.00		52	46	42	39	35	33	50	45	41	38	35	33	39	37	34	33	33	32	29	27		
1.25		57	50	48	44	41	39	55	49	46	43	40	38	44	42	39	37	38	37	34	32		
1.50		61	54	52	47	46	43	59	52	51	47	45	42	48	45	44	41	42	41	38	36		
2.00		66	58	59	53	53	49	64	57	57	52	52	48	54	51	50	47	48	46	44	42		
2.50		70	60	63	56	58	52	67	59	62	55	57	52	58	54	54	51	52	50	47	46		
3.00		72	62	67	58	62	55	70	61	65	58	60	55	61	56	57	53	55	52	50	49		
4.00		75	64	71	61	67	59	73	63	69	60	65	58	64	59	62	57	59	56	54	52		
5.00		77	65	73	63	70	61	74	64	71	62	68	60	67	61	64	59	61	58	56	55		
10.00		81	68	79	67	77	66	78	67	76	66	75	65	71	64	70	63	66	62	61	59		

