

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHR-33311N-PR9

光源	名 称	コンパクト形蛍光ランプ
	形 名	FHP32EN
	光束	2600 lm × 3

前 面	バツフル (白)
反射面	C G C ・ 樹脂 (白)

保守率	良	0.73
	中	0.69
	否	0.61

効 率	F 	0 %
	F 	80 %
	F 	80 %
	器具光束	6233 lm

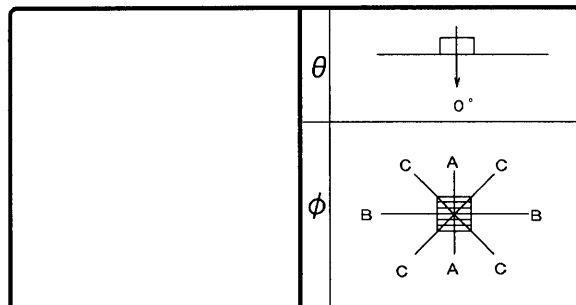

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	334	334	334
10°	332	324	327
20°	321	299	309
30°	298	264	280
40°	250	218	238
50°	171	165	178
60°	78	108	103
70°	31	51	38
80°	11	15	13
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井		80						70						50						30			20	0
	壁	床	70		50		30		70		50		30		50		30		30			10	0		
			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数		照 明 率 (×0.01)																							
0.60		53	49	43	40	36	35	52	48	42	40	36	35	41	39	35	34	35	34	31	29				
0.80		64	58	53	50	46	44	62	57	52	49	46	44	51	48	45	44	44	43	40	38				
1.00		69	62	59	55	52	49	67	61	58	54	52	49	56	53	50	49	49	48	45	43				
1.25		75	67	66	60	59	55	73	66	64	60	58	55	62	58	56	54	55	53	50	49				
1.50		79	70	70	64	64	59	77	69	69	63	63	59	66	62	61	58	59	57	54	52				
2.00		85	74	78	69	72	65	83	73	76	69	70	65	72	67	68	64	65	63	60	59				
2.50		89	77	82	72	77	69	86	75	80	72	75	68	76	70	72	67	69	66	64	62				
3.00		91	78	85	75	80	72	88	77	83	74	78	71	79	72	75	70	72	69	66	65				
4.00		95	80	90	78	86	75	91	79	87	77	83	75	82	75	79	73	75	72	70	68				
5.00		96	82	92	79	89	77	93	81	90	78	86	77	84	77	82	75	78	74	72	70				
10.00		100	84	98	83	96	82	97	83	95	82	93	81	89	80	87	79	82	78	76	75				

