

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FHR-33675N-PR9

光源	名 称	コンパクト形蛍光ランプ
	形 名	FHP32EN
	光束	2600 lm × 3

前 面	カバー（乳白）
反射面	塗装（白）

保守率	良	0.69
	中	0.65
	否	0.61

効 率	F 	0 %
	F 	62 %
	F 	62 %
	器具光束	4864 lm

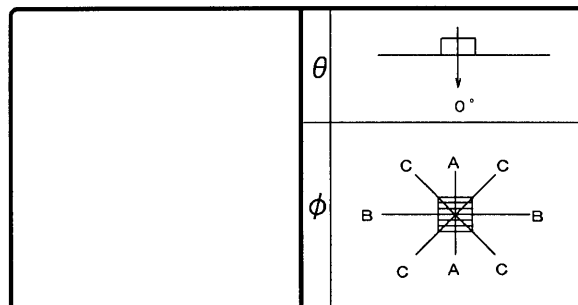

最大取付間隔		備考
A-A	1.2 H	
B-B	1.2 H	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	230	230	230
10°	225	225	225
20°	211	210	210
30°	189	189	188
40°	161	161	160
50°	129	129	127
60°	93	93	92
70°	57	56	56
80°	23	23	23
90°	2	2	2
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	30	10	0	10	0
室指数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0
照 明 率 (×0.01)																						
0.60		39	36	31	29	25	24	38	35	30	29	25	24	29	28	25	24	24	24	21	20	
0.80		47	43	38	36	33	31	46	42	38	35	32	31	36	35	32	31	31	30	27	26	
1.00		51	46	43	40	37	35	50	45	42	39	37	35	40	38	36	34	35	34	31	30	
1.25		56	50	48	44	42	40	54	49	47	44	42	39	45	42	40	39	39	38	35	34	
1.50		59	52	52	47	46	43	57	51	51	46	45	42	48	45	44	42	42	41	38	37	
2.00		65	56	58	52	53	48	62	55	56	51	52	48	54	50	50	47	48	46	44	42	
2.50		67	58	62	54	57	51	65	57	60	54	56	51	57	52	53	50	51	49	47	45	
3.00		70	60	64	56	60	54	67	59	63	56	59	53	59	54	56	52	53	51	49	48	
4.00		72	62	68	59	65	57	70	61	66	58	63	56	62	57	60	55	57	54	52	51	
5.00		74	63	71	61	67	59	71	62	68	60	65	58	64	58	62	57	59	56	54	53	
10.00		78	65	76	64	74	63	75	64	73	63	72	62	68	62	67	61	63	60	58	57	

