


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FHT-41401-P H9

保守率	良	0.73
	中	0.69
	否	0.61

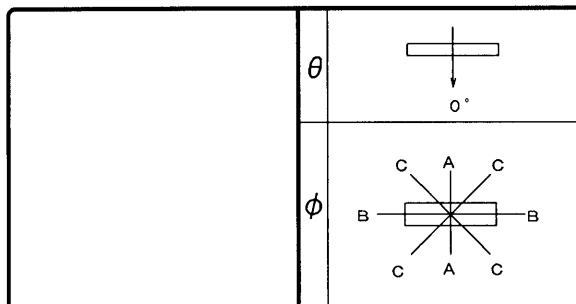

光源	名称	蛍光ランプ
	形名	FHF32EX-N-H
	光束	4950 lm × 1

効 率	F	0 %
	F	76 %
	F	76 %
	器具 光束	3753 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

前 面	
反射面	塗装 (白)

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	251	251	251
10°	244	248	250
20°	238	235	242
30°	221	214	223
40°	198	185	196
50°	169	151	163
60°	123	112	125
70°	74	70	75
80°	30	28	30
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		47	43	36	34	29	29	46	42	35	34	29	28	34	33	29	28	28	28	24	23		
0.80		56	51	45	43	38	37	55	50	45	42	38	37	43	41	37	36	36	36	32	31		
1.00		62	55	51	47	44	42	60	54	50	47	43	41	48	46	42	41	41	40	37	35		
1.25		68	60	58	53	50	47	66	59	56	52	50	47	54	51	48	46	47	45	42	40		
1.50		72	63	62	56	55	51	69	62	61	56	54	51	58	54	52	50	51	49	46	44		
2.00		78	68	70	62	63	58	75	67	68	62	62	57	65	60	60	56	58	55	52	51		
2.50		82	70	74	66	69	62	79	69	72	65	67	61	69	63	64	60	62	59	56	55		
3.00		84	72	78	68	73	65	81	71	76	67	71	64	72	66	68	63	65	62	59	58		
4.00		88	75	83	72	78	69	85	74	80	71	76	68	76	69	72	67	69	66	63	62		
5.00		90	76	86	74	82	71	87	75	83	73	79	70	78	71	75	69	71	68	66	64		
10.00		95	79	92	78	90	76	91	78	89	77	87	76	83	75	82	74	77	73	71	70		

