


■ 東芝ランプ 配光データシート

名 称	ネオハロビーム
形 名	JDR110V45W/ K5F-PD
光 束	500 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

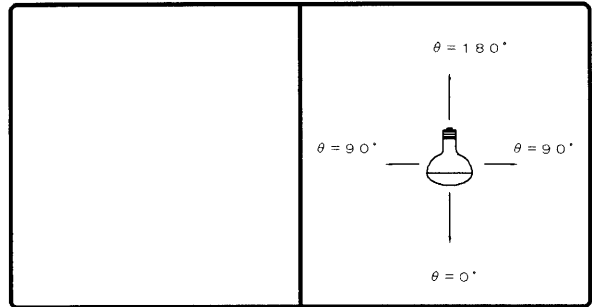

効 率	F	%
	F	%
	F	100 %
	器具 光束	500 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考	
----	--

光度 (cd/1000lm)			
0°	3000	25°	100
1°	3000	30°	40
2°	2996	35°	30
3°	2980	40°	20
4°	2960	45°	20
5°	2940	50°	6
6°	2900	55°	3
7°	2860	60°	3
8°	2810	65°	0
9°	2750	70°	0
10°	2680	75°	0
11°	2600	80°	0
12°	2480	85°	0
13°	2370	90°	0
14°	2230		
15°	2080		
16°	1880		
17°	1640		
18°	1320		
19°	900		
20°	600		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		88	81	80	76	75	73	86	80	79	75	75	72	77	74	73	71	72	70	68	67		
0.80		94	86	87	81	81	78	92	84	85	80	80	77	82	78	78	76	76	75	73	71		
1.00		99	89	91	85	86	82	96	87	89	84	85	81	86	81	82	79	80	77	75	74		
1.25		102	91	94	86	89	83	99	89	92	85	87	82	88	83	84	80	81	78	76	74		
1.50		104	92	97	88	91	85	101	90	94	86	89	84	89	84	86	81	82	79	77	75		
2.00		108	94	101	90	96	87	103	92	98	88	93	86	92	85	88	83	84	81	78	76		
2.50		110	95	104	92	99	90	106	93	101	90	96	88	94	87	91	85	86	82	80	77		
3.00		112	96	107	94	103	91	108	94	103	92	99	90	96	88	93	87	88	84	81	78		
4.00		115	98	111	96	108	95	110	96	107	94	104	93	99	91	97	89	90	86	84	81		
5.00		118	99	114	98	111	97	112	97	110	96	107	95	101	92	100	91	93	88	86	83		
10.00		122	102	121	102	120	102	116	100	116	100	115	100	106	96	106	96	98	92	90	87		

