


■ 東芝ランプ 配光データシート

名 称	ネオハロビーム
形 名	JDR110V45W/ K5S-PD
光 束	500 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

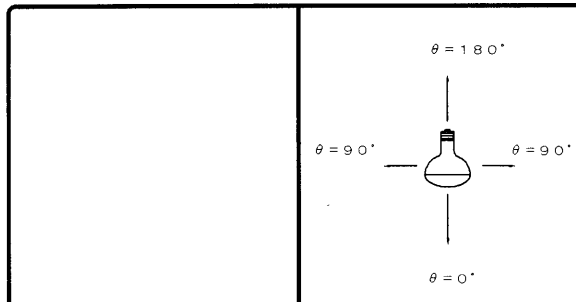

効 率	F	%
	F	%
	F	100 %
	器具 光束	500 lm

最大取付間隔	
A-A	0.2 H
B-B	0.2 H

備考	
----	--

光度 (cd/1000lm)			
0°	11800	25°	100
1°	11500	30°	90
2°	10800	35°	100
3°	9600	40°	90
4°	7700	45°	30
5°	5900	50°	17
6°	3800	55°	7
7°	2843	60°	0
8°	2210	65°	3
9°	1750	70°	7
10°	1323	75°	7
11°	1023	80°	0
12°	757	85°	26
13°	603	90°	30
14°	480		
15°	370		
16°	297		
17°	233		
18°	190		
19°	160		
20°	137		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		84	77	74	70	68	66	80	75	72	68	66	65	68	65	64	62	61	60	57	55		
0.80		91	82	81	76	75	72	87	80	78	74	73	70	73	70	69	67	65	64	61	58		
1.00		96	86	87	80	80	76	92	83	83	78	78	74	78	73	73	70	69	67	64	60		
1.25		100	89	91	83	84	79	95	85	87	80	81	77	80	75	76	72	70	68	65	61		
1.50		103	91	94	85	87	81	98	87	90	82	84	79	82	77	78	74	72	70	66	61		
2.00		108	94	99	89	93	85	101	90	94	86	89	82	85	79	81	77	74	72	67	63		
2.50		111	96	103	91	97	88	104	92	98	88	93	85	88	81	84	79	76	73	69	64		
3.00		113	97	107	93	101	90	107	93	101	90	96	87	90	83	87	81	78	75	71	65		
4.00		117	99	112	97	107	94	110	95	105	93	101	91	94	86	91	84	81	78	73	67		
5.00		119	101	115	99	111	97	112	97	108	95	105	93	96	87	94	86	84	79	75	69		
10.00		125	104	123	104	121	103	117	100	115	99	114	99	101	92	100	91	89	84	80	73		

