

東芝照明器具配光データシート


名 称	東芝蛍光灯器具
形 名	FHD-53001-P N8

光源	名 称	コンパクト形蛍光ランプ
	形 名	FHT57EX-N・H
	光束	4300 lm × 3

前 面	下面開放
反射面	銀色鏡面仕上げ

保守率	良	0.66
	中	0.63
	否	0.55

効 率	F 	0 %
	F 	63 %
	F 	63 %
	器具光束	8074 lm

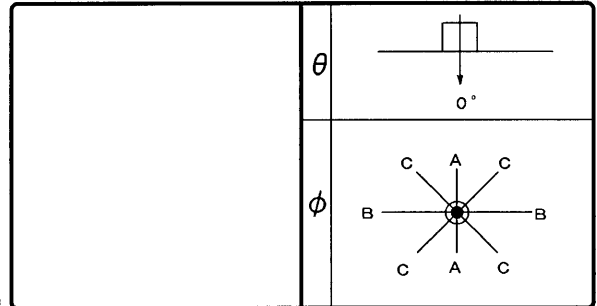

最大取付間隔		備考
A-A	1.9 H	
B-B	1.9 H	

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0							
$\theta \backslash \phi$	A-A	B-B	C-C			壁	70			50			30			70			50			30			50		30		30		10	0		
							床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数				照 明 率 (×0.01)																														
0°	140	140	140	0.60	38	35	29	27	23	22	37	34	28	27	23	22	27	26	22	22	22	22	19	18										
10°	141	141	141	0.80	46	42	37	35	31	30	45	41	36	34	31	30	35	33	30	29	29	29	26	25										
20°	165	165	165	1.00	51	46	42	39	36	34	49	45	41	39	36	34	40	38	35	34	34	33	30	29										
30°	201	201	201	1.25	56	50	48	44	42	40	55	49	47	44	42	39	45	42	40	39	39	38	35	34										
40°	197	197	197	1.50	60	53	52	47	46	43	58	52	51	47	46	43	49	46	44	42	43	41	39	38										
50°	157	157	157	2.00	65	57	59	52	54	49	63	56	57	52	53	49	54	51	51	48	49	47	45	43										
60°	107	107	107	2.50	68	59	63	55	58	52	66	58	61	55	57	52	58	53	54	51	52	50	48	47										
70°	46	46	46	3.00	70	60	65	57	61	55	68	59	64	57	60	54	60	55	57	53	55	52	50	49										
80°	4	4	4	4.00	73	62	69	60	66	58	71	61	67	59	64	57	63	58	61	56	58	55	53	52										
90°	0	0	0	5.00	75	63	72	61	69	60	72	62	69	61	67	59	65	59	63	58	60	57	55	54										
100°	0	0	0	10.00	78	65	76	64	75	63	75	65	74	64	72	63	69	62	68	62	64	60	59	58										
110°	0	0	0																															
120°	0	0	0																															
130°	0	0	0																															
140°	0	0	0																															
150°	0	0	0																															
160°	0	0	0																															
170°	0	0	0																															
180°	0	0	0																															

