


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FHR-42437-P K9

保守率	良	0.69
	中	0.65
	否	0.61

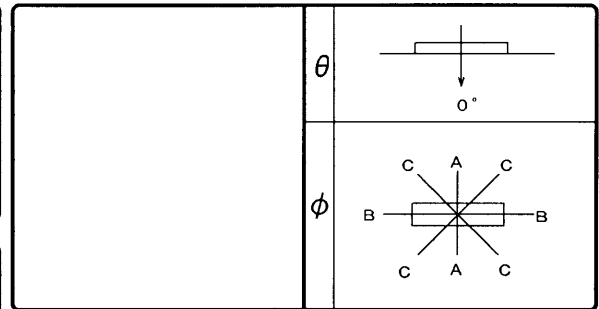

光源	名称	蛍光ランプ
	形名	FHF32EX-N-H
	光束	4950 lm × 2

効率	F	0 %
	F	61 %
	F	61 %
	器具光束	6048 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

前 面	ガラス (クリアー)
反射面	塗装 (白)

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	220	220	220
10°	213	218	218
20°	208	206	209
30°	198	187	195
40°	175	160	173
50°	136	127	141
60°	90	87	95
70°	48	45	48
80°	8	10	8
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		39	36	30	29	25	24	38	35	30	28	25	24	29	28	24	24	24	21	20			
0.80		47	42	38	36	33	31	45	41	37	35	32	31	36	35	32	31	31	30	28	27		
1.00		51	46	43	40	37	35	50	45	42	39	37	35	40	38	36	35	35	34	32	30		
1.25		56	50	48	44	43	40	54	49	47	44	42	40	45	43	41	39	40	39	36	35		
1.50		59	52	52	47	46	43	57	51	51	46	46	43	48	45	44	42	43	41	39	38		
2.00		64	56	58	52	53	48	62	55	56	51	52	48	54	50	50	47	48	46	44	43		
2.50		67	58	61	54	57	51	65	57	60	54	56	51	57	52	53	50	51	49	47	46		
3.00		69	59	64	56	60	54	67	58	62	55	59	53	59	54	56	52	54	51	49	48		
4.00		72	61	68	59	64	57	69	60	66	58	63	56	62	57	59	55	57	54	52	51		
5.00		73	62	70	60	67	58	71	61	68	59	65	58	64	58	62	57	58	56	54	53		
10.00		76	64	75	63	73	62	74	63	72	62	71	61	67	61	66	60	62	59	58	57		

