


東芝照明器具配光データシート

名 称	蛍光灯器具
形 名	FHR-42745-P K9

保守率	良	0.73
	中	0.69
	否	0.61

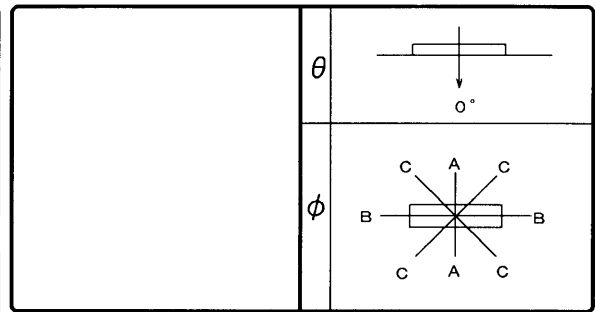

光源	名 称	蛍光ランプ
	形 名	FHF32EX-N-H
	光束	4950 lm × 2

効 率	F	0 %
	F	60 %
	F	60 %
	器具 光束	5907 lm

最大取付間隔	
A-A	1.1 H
B-B	1.3 H

備考	
----	--

前 面	
反射面	塗装 (白)

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0		
θ \ φ	A-A	B-B	C-C			壁		70		50		30		70		50		30		50		30		30		10	0		
	床	30	10			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
				室指数	照 明 率 (×0.01)																								
0°				0.60	41	38	34	32	29	28	40	37	33	32	29	28	32	31	28	28	28	27	25	24					
10°				0.80	49	44	41	39	36	35	48	43	41	38	36	35	39	38	35	34	35	34	32	31					
20°				1.00	53	47	45	42	40	38	51	46	45	42	40	38	43	41	39	38	38	37	35	34					
30°				1.25	57	50	50	46	45	42	55	50	49	45	44	42	47	44	43	41	42	41	39	37					
40°				1.50	60	52	53	48	48	45	58	52	52	48	48	45	50	47	46	44	45	43	41	40					
50°				2.00	64	56	58	52	54	49	62	55	57	52	53	49	54	50	51	48	49	47	45	44					
60°				2.50	66	57	61	54	57	52	64	56	60	54	56	51	57	53	54	51	52	50	48	47					
70°				3.00	68	58	64	56	60	54	66	58	62	55	59	53	59	54	56	52	54	51	50	49					
80°				4.00	71	60	67	58	64	56	68	59	65	57	62	56	61	56	59	55	56	54	52	51					
90°				5.00	72	61	69	59	66	58	69	60	67	59	64	57	63	57	61	56	58	55	54	53					
100°				10.00	75	63	73	62	72	61	72	62	71	61	69	60	66	60	65	59	61	58	57	56					
110°																													
120°																													
130°																													
140°																													
150°																													
160°																													
170°																													
180°																													

