

東芝照明器具配光データシート


名 称	アウトドアLEDスポットライト
形 名	LEDS80903NL-LS

効 率	F 	17 %
	F 	83 %
	F 	100 %
	器具 光束	225 lm

保 守 率	良	0.69
	中	0.67
	否	0.63

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

前 面	ガラス（透明着色）
反射面	

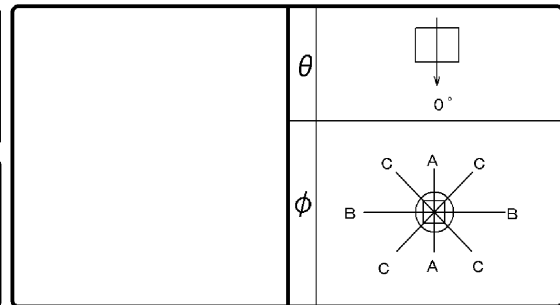

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	345		
10°	362		
20°	376		
30°	348		
40°	244		
50°	115		
60°	62		
70°	42		
80°	33		
90°	32		
100°	29		
110°	28		
120°	29		
130°	23		
140°	25		
150°	22		
160°	28		
170°	25		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固 有 照 明 率 (×0.01)																					
0.60		63	58	50	47	42	40	60	56	48	46	41	39	45	44	39	38	37	36	32	30		
0.80		74	67	60	56	52	50	70	64	58	55	50	49	55	52	48	46	46	44	40	37		
1.00		82	74	69	64	61	58	79	71	67	63	59	56	63	59	56	54	53	52	47	44		
1.25		89	79	77	70	68	64	85	76	74	68	66	63	69	65	62	60	59	57	52	49		
1.50		94	83	83	75	74	69	90	80	80	73	72	67	74	69	67	64	63	61	57	53		
2.00		101	88	91	82	83	76	96	85	87	79	80	74	80	75	75	71	70	67	63	59		
2.50		106	91	97	85	89	80	100	88	92	83	86	78	85	78	80	75	74	71	66	62		
3.00		109	93	101	88	94	84	103	90	96	86	90	82	88	81	83	77	77	73	69	65		
4.00		113	96	106	92	100	88	107	93	101	89	96	86	92	84	88	81	81	77	73	68		
5.00		115	97	109	94	104	91	109	94	104	91	99	88	94	86	91	83	83	79	75	71		
10.00		120	101	117	99	114	97	114	97	111	96	108	94	100	90	98	89	89	84	80	75		

