

東芝照明器具配光データシート


名 称	東芝スポットライト
形 名	BFB13120Z (W) CN

光源	名 称	ネオボールZ
	形 名	EFD15EL/13-Z
	光束	810 lm × 1

前 面	ガラス (クリアー)
反射面	塗装 (白)

保守率	良	0.78
	中	0.74
	否	0.70

効 率	F	0 %
	F	14 %
	F	14 %
	器具光束	116 lm

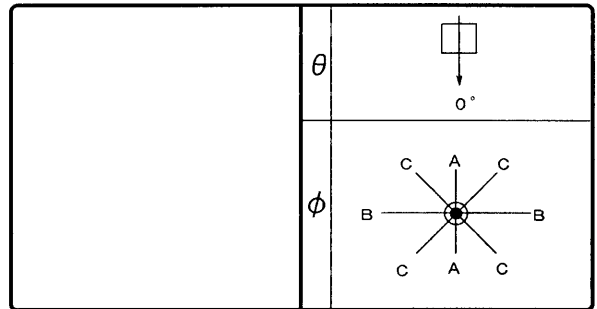

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	60		
10°	64		
20°	63		
30°	52		
40°	36		
50°	25		
60°	17		
70°	9		
80°	4		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		9	9	7	7	6	6	9	8	7	7	6	6	7	7	6	6	6	6	5	5		
0.80		11	10	9	9	8	8	11	10	9	9	8	8	9	8	8	8	8	8	7	7		
1.00		12	11	10	9	9	9	12	11	10	9	9	8	10	9	9	8	8	8	8	7		
1.25		13	12	11	10	10	9	13	11	11	10	10	9	11	10	10	9	9	9	9	8		
1.50		14	12	12	11	11	10	13	12	12	11	11	10	11	11	10	10	10	10	9	9		
2.00		15	13	13	12	12	11	14	13	13	12	12	11	12	11	12	11	11	11	10	10		
2.50		15	13	14	12	13	12	15	13	14	12	13	12	13	12	12	11	12	11	11	11		
3.00		16	14	15	13	14	12	15	13	14	13	13	12	13	12	13	12	12	12	11	11		
4.00		16	14	16	13	15	13	16	14	15	13	14	13	14	13	14	13	13	12	12	12		
5.00		17	14	16	14	15	13	16	14	15	14	15	13	15	13	14	13	13	13	12	12		
10.00		17	15	17	14	17	14	17	14	16	14	16	14	15	14	15	14	14	13	13	13		

