


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-66001ML-LS1

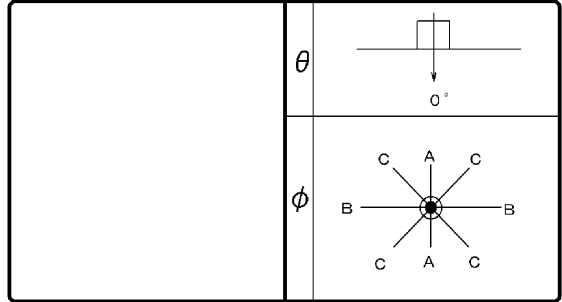

効 率	F $\frac{1}{2}$	0 %
	F $\frac{1}{4}$	100 %
	F \bigcirc	100 %
	器具 光束	365 lm

保守 率	良	0.76
	中	0.72
	否	0.64

前面	カバー (透明)
反射面	白色

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

データは初期の標準値です。

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	521		
10°	536		
20°	500		
30°	446		
40°	352		
50°	142		
60°	63		
70°	24		
80°	5		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0
室指数	固有照明率 (×0.01)																								
0.60	70	64	57	54	49	47	68	63	56	53	48	47	54	52	48	46	47	46	42	41					
0.80	81	73	68	64	60	58	79	72	67	63	60	57	65	62	59	57	57	56	52	51					
1.00	90	81	78	73	70	67	88	80	77	72	69	66	74	71	68	65	66	65	61	59					
1.25	97	86	86	79	78	73	95	85	84	78	77	73	81	77	75	72	73	71	68	66					
1.50	103	90	92	84	85	79	100	89	90	83	83	78	87	81	81	77	79	76	73	71					
2.00	109	95	101	90	94	86	106	94	98	89	92	85	94	87	89	84	86	83	80	78					
2.50	114	98	106	93	100	90	110	97	103	93	97	89	98	91	94	88	90	86	84	82					
3.00	116	100	110	96	104	93	113	98	107	95	101	92	101	93	97	90	93	89	86	85					
4.00	120	102	114	99	110	96	116	101	111	98	107	95	105	96	101	94	97	92	90	88					
5.00	122	103	117	101	113	98	118	102	114	100	110	98	107	98	104	96	99	94	92	90					
10.00	126	106	124	104	121	103	122	104	120	103	117	102	112	101	110	100	104	98	97	95					

