


■ 東芝ランプ 配光データシート


名 称	ミニクリLED電球
形 名	LDA3N-E17
光 束	290 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

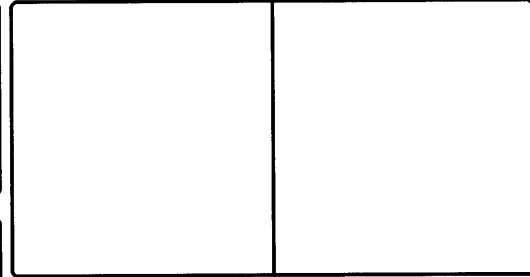

効 率		%
		%
	F ○	100 %
	器具 光束	290 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

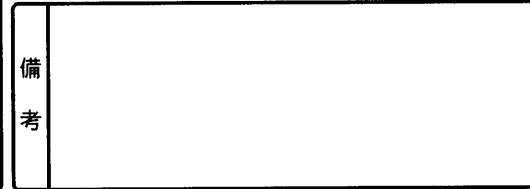

光度 (cd/1000lm)		
θ	φ	A-A
0°		255
10°		256
20°		254
30°		239
40°		212
50°		174
60°		122
70°		71
80°		40
90°		23
100°		0
110°		0
120°		0
130°		0
140°		0
150°		0
160°		0
170°		0
180°		0

反 射 率 (%)	天井	80						70						50				30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
	室指数	照 明 率 (×0.01)																					
	0.60	49	45	37	35	29	28	48	44	36	34	29	28	35	33	28	28	28	27	23	22		
	0.80	58	53	46	43	38	36	57	52	45	42	38	36	43	41	37	35	36	35	31	29		
	1.00	66	60	54	50	46	44	64	58	53	49	45	43	51	48	44	42	43	42	37	35		
	1.25	73	64	61	56	53	50	70	63	60	55	52	49	57	53	50	48	49	47	43	41		
	1.50	78	68	67	60	59	54	75	67	65	60	58	54	62	58	55	53	53	52	48	46		
	2.00	84	73	75	67	67	61	81	72	73	66	66	61	69	64	63	60	61	58	55	53		
	2.50	88	76	80	71	73	66	85	75	78	70	71	65	73	68	68	64	65	62	59	57		
	3.00	92	78	84	74	78	69	88	77	81	72	76	68	76	70	72	67	68	65	62	60		
	4.00	95	81	89	77	84	74	92	80	86	76	81	73	81	74	77	71	73	69	67	65		
	5.00	98	83	93	79	88	76	94	81	89	78	85	75	84	76	80	74	76	72	69	67		
	10.00	103	86	100	84	97	82	99	85	96	83	94	81	89	81	87	79	82	78	76	74		

