


■ 東芝ランプ 配光データシート

名 称	LED電球
形 名	LDA6L
光 束	330 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

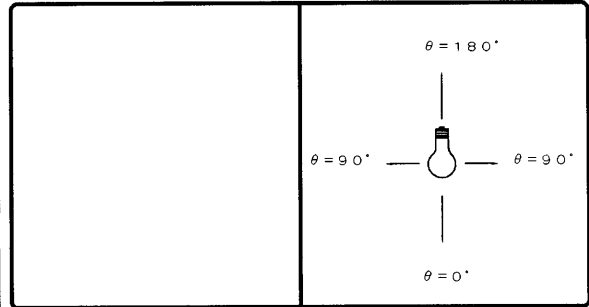

効 率	F	%
	F	%
	F	100 %
	器具 光束	330 lm

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備 考	
--------	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	268		
10°	270		
20°	269		
30°	255		
40°	228		
50°	186		
60°	136		
70°	91		
80°	59		
90°	38		
100°	24		
110°	16		
120°	10		
130°	7		
140°	2		
150°	1		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		58	53	43	41	34	33	55	51	42	40	33	32	39	38	32	31	31	30	25	23		
0.80		68	62	53	50	44	42	66	60	52	49	43	41	49	47	41	40	39	38	33	31		
1.00		78	70	63	58	53	50	74	67	61	57	51	49	57	54	49	47	47	46	41	38		
1.25		85	75	71	65	61	57	81	73	69	63	59	56	64	61	56	54	54	52	47	44		
1.50		91	80	77	70	68	63	87	77	75	69	66	62	70	66	62	59	59	57	52	49		
2.00		99	86	87	78	78	71	94	84	84	76	76	70	78	73	71	67	67	65	60	57		
2.50		104	90	93	82	85	76	99	87	90	81	82	75	83	77	77	72	73	70	65	62		
3.00		108	92	98	86	90	80	103	90	94	84	87	79	87	80	82	76	77	73	69	66		
4.00		112	95	104	90	98	86	107	93	100	88	94	84	93	85	88	81	82	78	74	71		
5.00		115	97	109	93	103	89	110	95	104	91	99	88	96	87	92	84	85	81	77	74		
10.00		122	102	118	99	114	97	116	99	113	97	109	95	103	93	101	91	93	88	85	81		

