

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FT-42105K-S L16

光 源	名称 蛍光灯ランプ
	形 名 FL40SS・EX-N /37-H
	光束 3560 lm × 2

前 面	
反射面	塗装 (白)

良	0.74
中	0.70
否	0.61

効 率	F $\frac{1}{2}$	1 %
	F $\frac{3}{4}$	79 %
	F $\bigcirc$	80 %
器具 光束		5664 lm

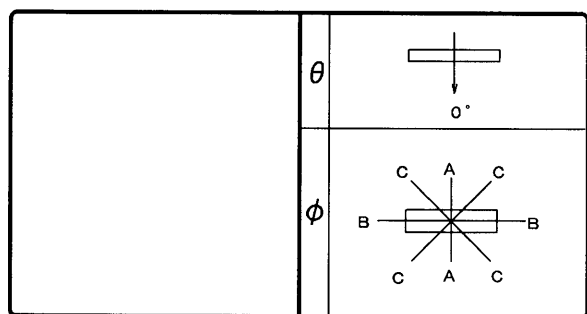

最大取付間隔	
A-A	1.4 H
B-B	1.3 H
備 考	

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	228	228	228
10°	223	224	225
20°	216	213	216
30°	206	194	202
40°	193	168	181
50°	175	138	158
60°	153	104	131
70°	111	67	100
80°	70	28	57
90°	32	0	20
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数		照 明 率 (×0.01)																					
0.60		47	43	35	33	28	27	46	42	35	33	28	27	33	32	27	26	27	26	22	21		
0.80		56	51	44	42	37	35	55	50	44	41	36	35	42	40	35	34	34	34	30	28		
1.00		62	56	50	47	42	40	60	54	49	46	42	40	47	45	41	39	39	38	34	33		
1.25		68	61	57	52	49	46	66	59	56	52	48	46	53	50	47	45	45	44	40	38		
1.50		73	64	62	56	54	50	70	62	60	55	53	50	57	54	51	49	49	48	44	42		
2.00		79	69	70	63	63	57	76	68	68	62	61	56	64	60	59	55	56	54	50	49		
2.50		83	72	75	66	68	61	80	70	73	65	66	61	68	63	63	59	61	58	55	53		
3.00		86	74	79	69	73	65	83	73	76	68	71	64	72	66	67	63	64	61	58	56		
4.00		90	77	84	73	79	69	87	75	81	72	77	68	76	70	72	67	69	65	63	61		
5.00		93	78	88	75	83	72	89	77	84	74	80	71	79	72	76	70	72	68	65	64		
10.00		98	82	95	80	92	78	94	81	92	79	89	77	85	77	83	76	78	74	72	70		

