

東芝照明器具配光データシート


名 称	蛍光灯器具
形 名	FR-22412N-S H15

光 源	名称 蛍光ランプ
	形 名 FL20SS・EX-N /18-Z
	光 束 1550 lm × 2

前 面	下面開放
反射面	塗装 (白)

保 守 率	良 0.74
	中 0.70
	否 0.61

効 率	F  0%
	F  85%
	F  85%
	器具 光束 2631 lm

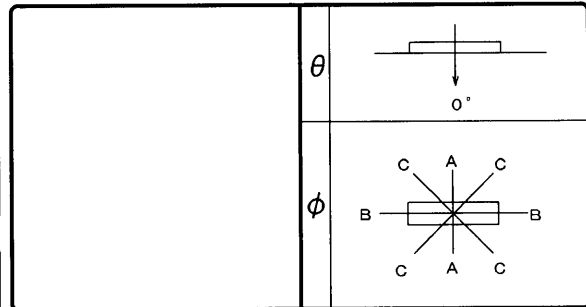

最大取付間隔	
A-A	1.4 H
B-B	1.3 H
備 考	

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	265	265	265
10°	265	260	262
20°	260	246	255
30°	248	227	241
40°	229	197	218
50°	196	162	187
60°	149	119	146
70°	95	74	94
80°	33	27	37
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井		80						70						50						30		20	0
	壁	床	70		50		30		70		50		30		50		30		30		10	0		
			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																						
0.60		52	48	40	38	32	31	50	47	39	37	32	31	38	36	31	30	31	30	26	25			
0.80		62	57	50	47	42	40	60	55	49	46	41	40	47	45	41	39	40	39	35	33			
1.00		69	62	57	52	48	46	66	60	55	52	48	46	53	50	46	45	45	44	40	38			
1.25		75	67	64	59	56	52	73	66	62	58	55	52	60	56	53	51	52	50	46	44			
1.50		80	70	69	63	61	57	77	69	67	62	60	56	64	60	58	55	56	54	50	49			
2.00		87	76	78	69	70	64	84	74	76	68	69	64	72	67	66	62	64	61	58	56			
2.50		91	79	83	73	76	69	88	77	81	72	74	68	76	70	71	67	68	66	62	61			
3.00		94	81	87	76	81	72	91	80	84	75	79	71	80	73	75	70	72	69	66	64			
4.00		98	84	92	80	87	77	95	82	90	79	85	76	84	77	81	74	77	73	70	69			
5.00		101	85	96	82	91	79	97	84	93	81	89	79	87	79	84	77	80	76	73	72			
10.00		106	89	103	87	101	85	102	87	100	86	97	85	93	84	91	83	86	81	80	78			

